



TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,
Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: tstsales@mail.taisaw.com Web: www.taisaw.com

Product Specifications Approval Sheet

Product Description: SAW Filter 870.5 MHz SMD 3.0×3.0 mm (BW=11 MHz)

TST Part No.: TA2522ATCA

Customer Part No.: _____

Customer signature required
Company: _____
Division: _____
Approved by : _____
Date: _____

Checked by: _____ David Chang *David*

Approved by: _____ Andy Yu *Andy Yu*

Date: _____ 2019/08/09

1. Customer signed back is required before TST can proceed with sample build and receive orders.
2. Orders received without customer signed back will be regarded as agreement on the specifications.
3. Any specifications changes must be approved upon by both parties and a new revision of specifications shall be released to reflect the changes.



TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,
Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: ttsales@mail.taisaw.com Web: www.taisaw.com

SAW Filter 870.5 MHz (TC SAW)

MODEL NO.: TA2522ATCA

REV. NO.:1

A. MAXIMUM RATING:

1. Input Power Level: 22 dB_m
2. DC voltage: 4 V
3. Operating Temperature: -40°C to +125°C
4. Storage Temperature: -40°C to +125°C
5. Moisture Sensitivity Level: Level 1 (MSL1)

RoHS Compliant
Lead free
Lead-free soldering


HiQ Saw

Electrostatic Sensitive Device (ESD)

B. ELECTRICAL CHARACTERISTICS:


Item	Unit	Min.	Typ.	Max.
Center frequency F_c	MHz	-	870.5	-
Insertion Loss (865~876 MHz) IL	dB	-	3.6	5.5
Amplitude Ripple (865~876 MHz)	dB _{p-p}	-	1.8	2.4
VSWR (865~876 MHz)	-	-	2.4	3.0
Attenuation (Reference level from 0 dB)				
100~815 MHz	dB	35	40	-
815~832 MHz	dB	35	40	-
832~848 MHz	dB	35	41	-
848~860 MHz	dB	10	25	-
860~862 MHz	dB	2	10	-
880~886 MHz	dB	2	14	-
886~915 MHz	dB	30	45	-
915~1000 MHz	dB	40	47	-
Temperature Coefficient of Frequency	ppm/°C	-	-14	-

C. MEASUREMENT CIRCUIT:

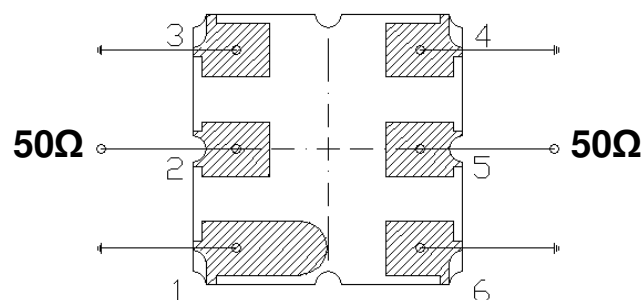


(2): Unbalance Port
(5): Unbalance Port
Others: Ground

D. OUTLINE DRAWING:

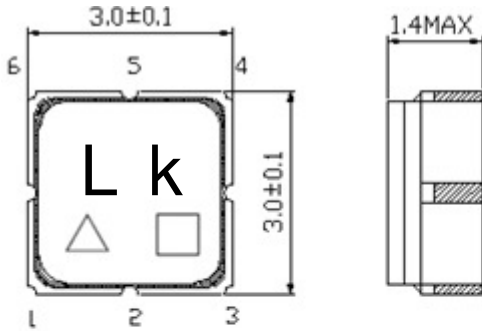

Unit : mm

Not Specified Tolerance : +/-0.15 mm

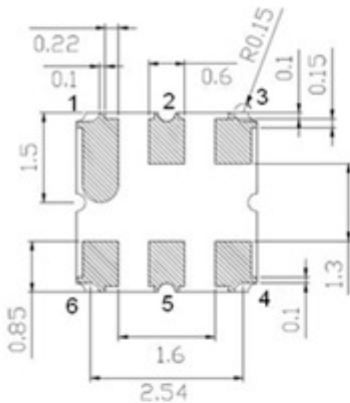

Pin No.	Symbol	Function
1	GND	Ground
2	IN	Input
3	GND	Ground
4	GND	Ground
5	OUT	Output
6	GND	Ground


△ : Year Code (2011->1, 2012->2, ..., 2019->9, 2020->0)

□ : Date Code

Date Code Table:

WK01	WK02	WK03	WK04	WK05	WK06	WK07	WK08	WK09	WK10	WK11	WK12	WK13
A	B	C	D	E	F	G	H	I	J	K	L	M
WK14	WK15	WK16	WK17	WK18	WK19	WK20	WK21	WK22	WK23	WK24	WK25	WK26
N	O	P	Q	R	S	T	U	V	W	X	Y	Z
WK27	WK28	WK29	WK30	WK31	WK32	WK33	WK34	WK35	WK36	WK37	WK38	WK39
a	b	c	d	e	f	g	h	i	j	k	l	m
WK40	WK41	WK42	WK43	WK44	WK45	WK46	WK47	WK48	WK49	WK50	WK51	WK52
n	o	p	q	r	s	t	u	v	w	x	y	z




E. PCB Footprint:

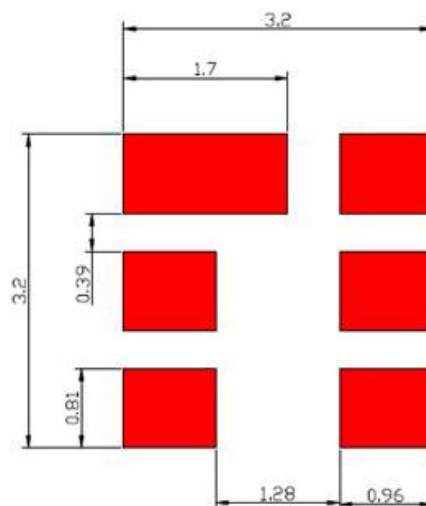

TAI-SAW TECHNOLOGY CO., LTD.


TST DCC
Release document

F. Frequency Characteristics:

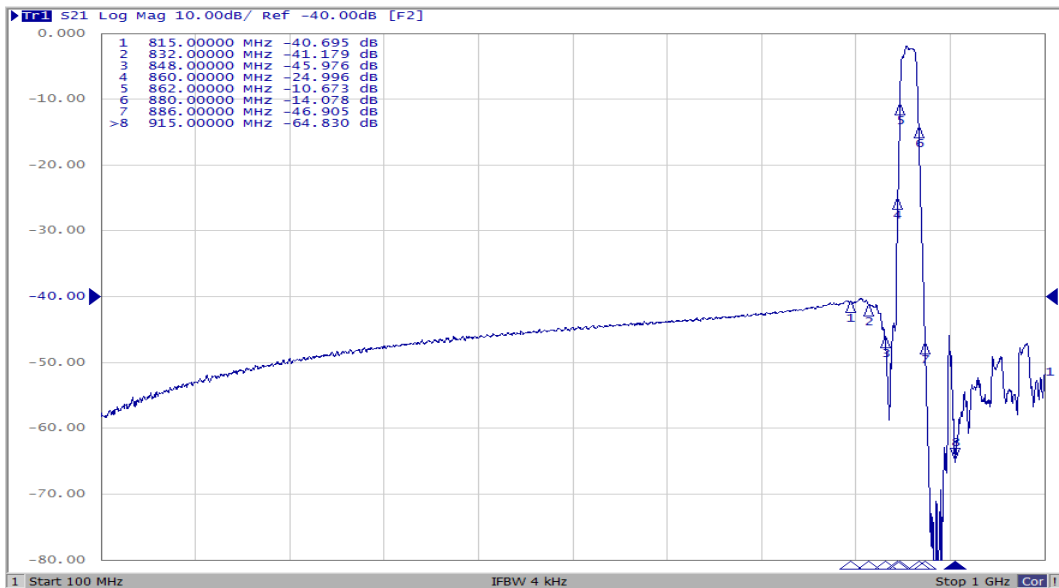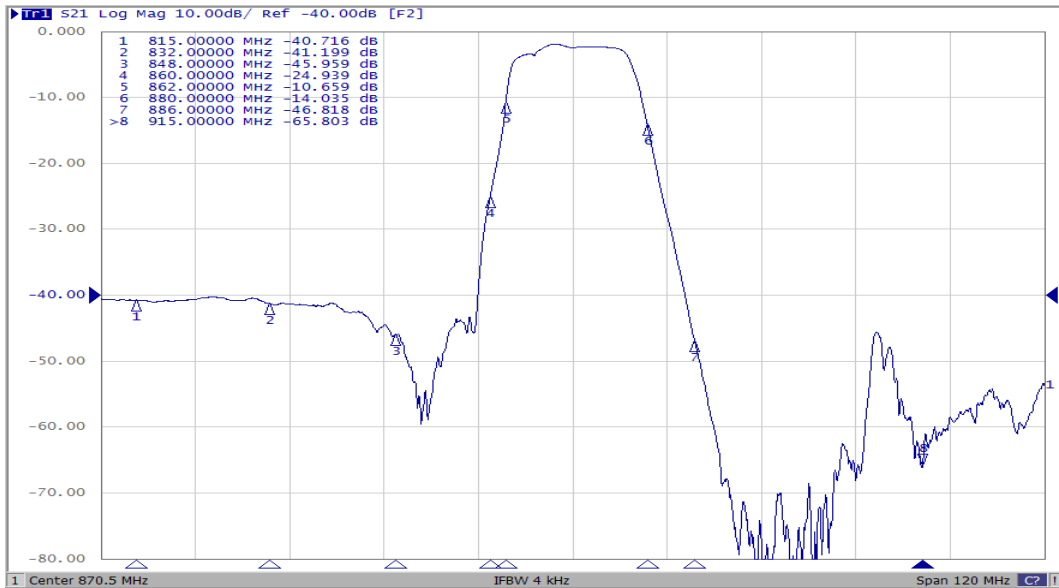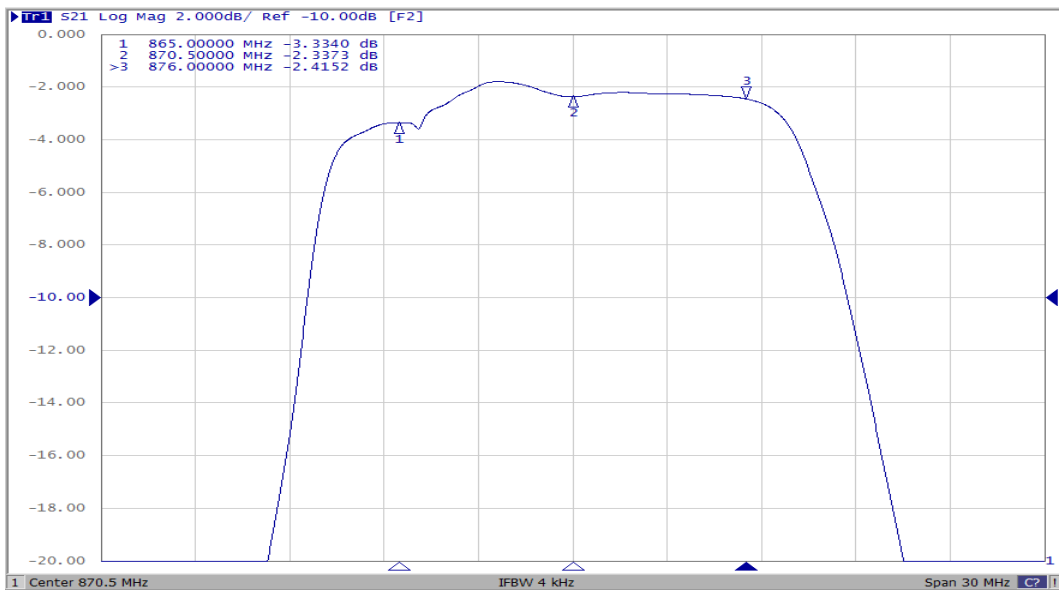


Reflection Functions:

S11

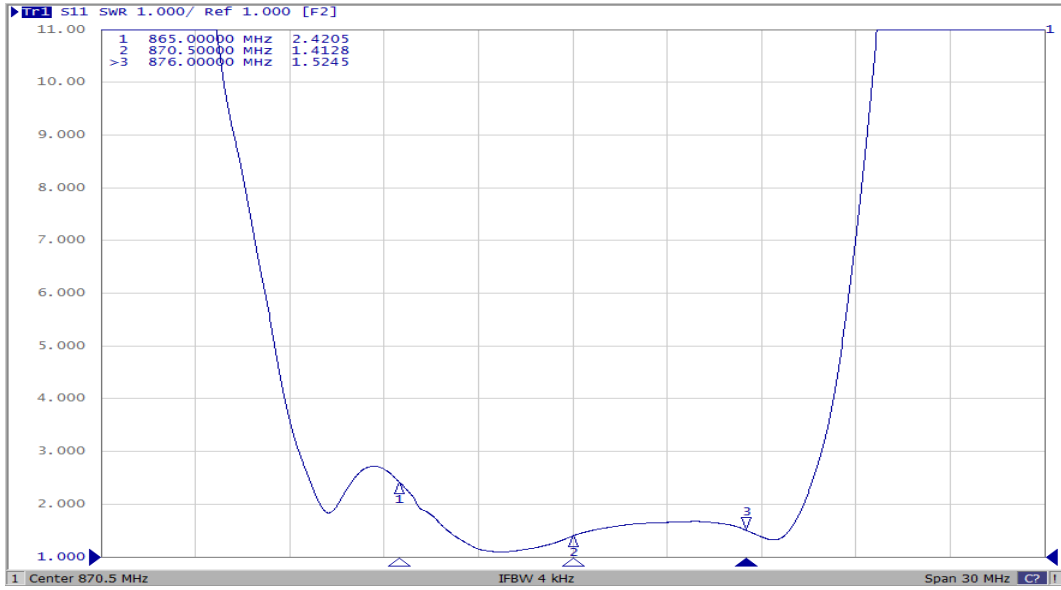

S22

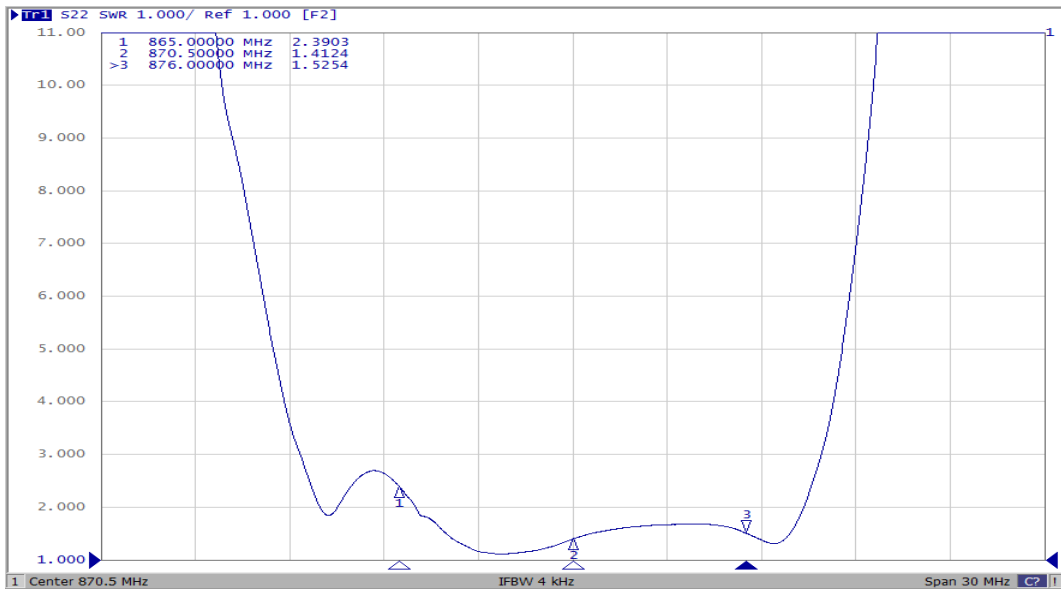

H. Recommended Reflow Profile:

1. Preheating shall be fixed at 150~180°C for 60~90 seconds.
2. Ascending time to preheating temperature 150°C shall be 30 seconds min.
3. Heating shall be fixed at 220°C for 50~80 seconds and at 260°C+0/-5°C peak (20~40sec).
4. Time: 2 times.

