



TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,
Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: tstsales@mail.taisaw.com Web: www.taisaw.com

Product Specifications Approval Sheet

Product Name: SAW Resonator 250MHz SMD 3.8X3.8 mm

TST Parts No.: TC0605A

Customer Parts No.: _____

Customer signature required
Company: _____
Division: _____
Approved by : _____
Date: _____

Checked by: _____ Hongpu Lin *Hong Pu Lin*

Approval by: _____ Andy Yu *Andy Yu*

Date: _____ 2019/04/25

1. Customer signed back is required before TST can proceed with sample build and receive orders.
2. Orders received without customer signed back will be regarded as agreement on the specifications.
3. Any specifications changes must be approved upon by both parties and a new revision of specifications shall be released to reflect the changes.

TST TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,
Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: tstsales@mail.taisaw.com Web: www.taisaw.com

SAW Resonator 250MHz

MODEL NO.: TC0605A

REV. NO.: 2.0

A. FEATURES:

1. 1-Port Resonator.

B. MAXIMUM RATING:

1. Input Power Level: 0 dBm

2. DC voltage: 5 V

3. Operating Temperature: -40°C to +85°C

4. Storage Temperature: -40°C to +85°C

5. Moisture Sensitive Level: Level 1 (MSL1)

C. ELECTRICAL CHARACTERISTICS:


Characteristic	Units	Minimum	Typical	Maximum
Center frequency Fr	MHz	249.950	250.000	250.050
Insertion Loss IL	dB	-	1.2	2.0
Unload quality factor Qu		-	14180	-
Equivalent Elements				
Motional capacitance C1	fF	-	2.3	-
Motional inductance L1	μH	-	174	-
Motional resistance R1	Ohm	-	15.7	-
Parallel capacitance Co	pF	-	4.2	-
Temp.coeff.	ppm/c*2	-	0.032	-
Turnover To	deg.C	-	25	-
Package size		SMD 3.8X3.8X1.4mm		

RoHS Compliant
Lead free
Lead-free soldering


Electrostatic Sensitive Device (ESD)

D. EQUIVIRENT CIRCUIT:

One-Port Resonator:

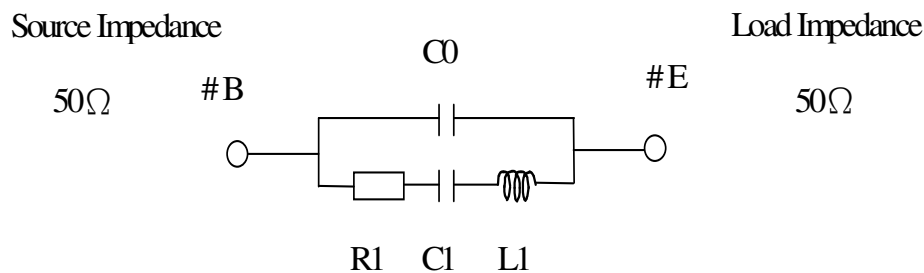

E. OUTLINE DRAWING:

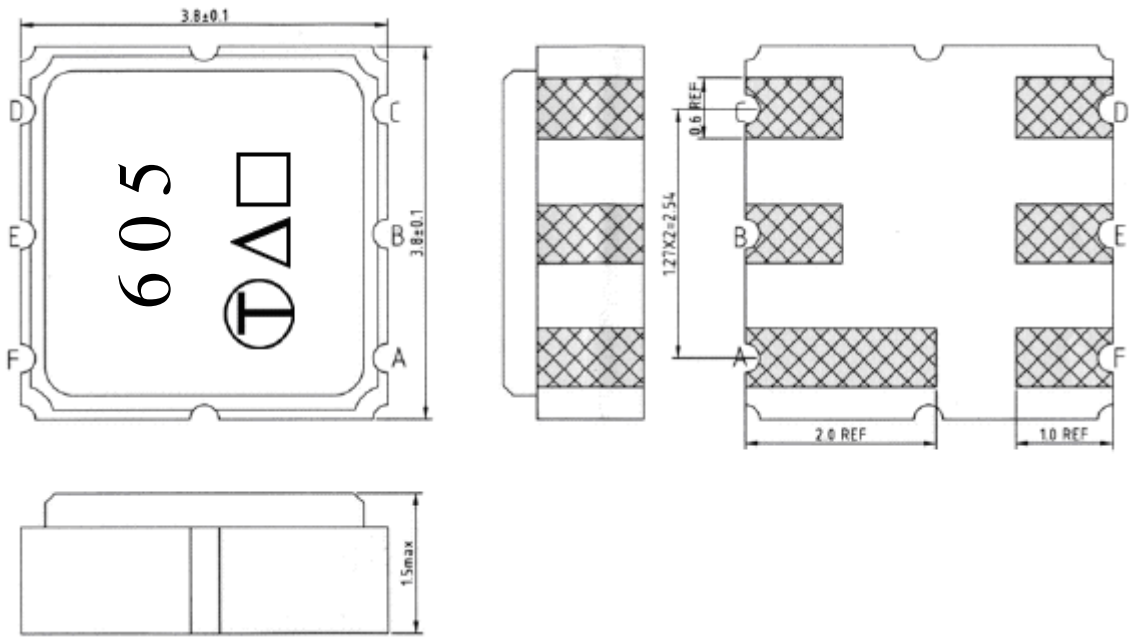

#E : Input or Output

#B : Output or Input

#A、C、D、F : Ground

△ : Year Code

□ : Data Code(Follow the table provided by planer each year)


□ Data code : See the table

WK01	WK02	WK03	WK04	WK05	WK06	WK07	WK08	WK09	WK10	WK11	WK12	WK13
A	B	C	D	E	F	G	H	I	J	K	L	M
WK14	WK15	WK16	WK17	WK18	WK19	WK20	WK21	WK22	WK23	WK24	WK25	WK26
N	O	P	Q	R	S	T	U	V	W	X	Y	Z
WK27	WK28	WK29	WK30	WK31	WK32	WK33	WK34	WK35	WK36	WK37	WK38	WK39
a	b	c	d	e	f	g	h	i	j	k	l	m
WK40	WK41	WK42	WK43	WK44	WK45	WK46	WK47	WK48	WK49	WK50	WK51	WK52
n	o	p	q	r	s	t	u	v	w	x	y	z

△ Year code : See the table

Year	2011 2013	2012 2014
Year code	C	c


F.FREQUENCY CHARACTERISTICS:

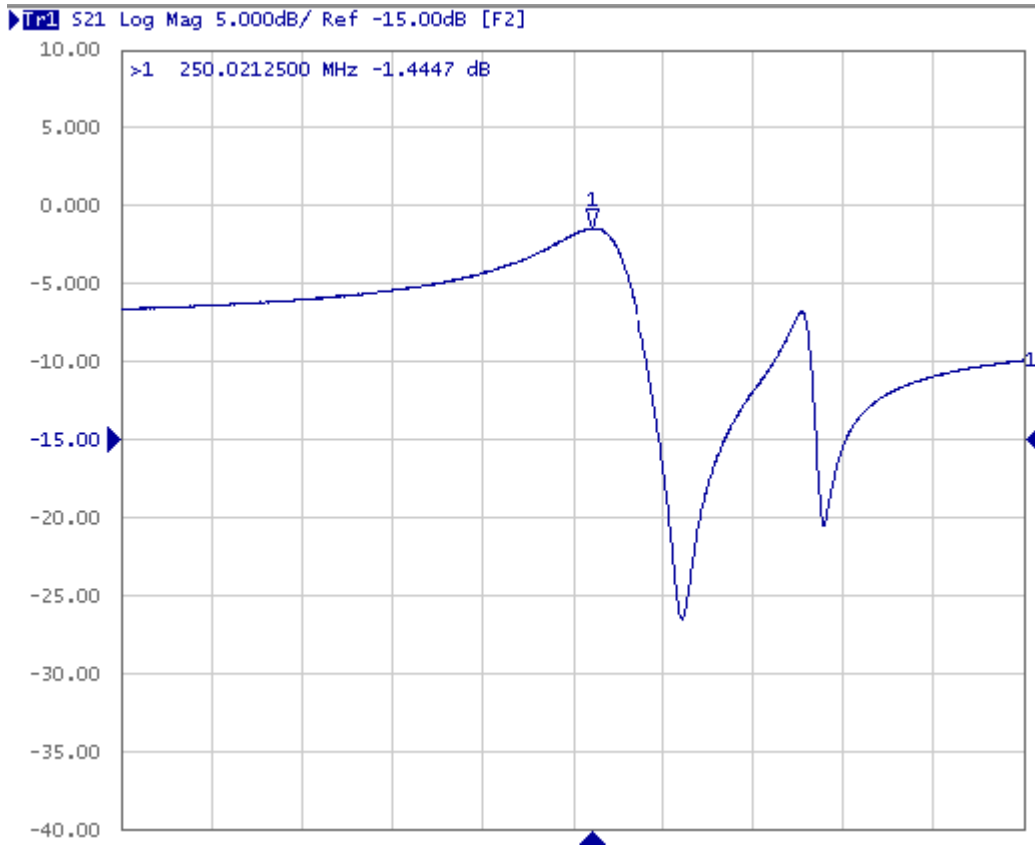

G. TEST CIRCUIT:

Network analyzer


From 50Ω
Network
Analyzer

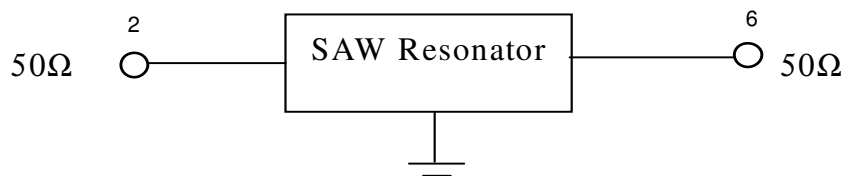

To 50Ω
Network
Analyzer


1、3、4、5、7、8

H.PCB FOOTPRINT:

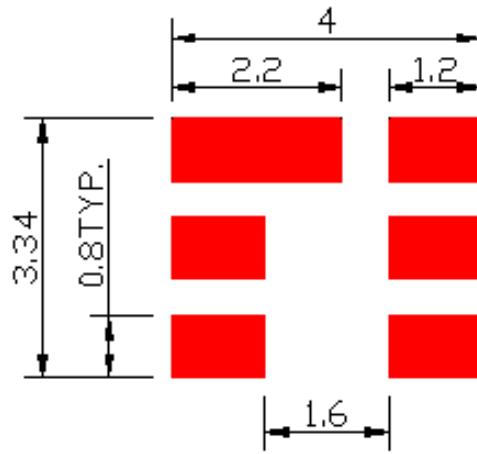


I.PACKING:
REEL DIMENSION

(Please refer to FR-75D10 for packing quantity)

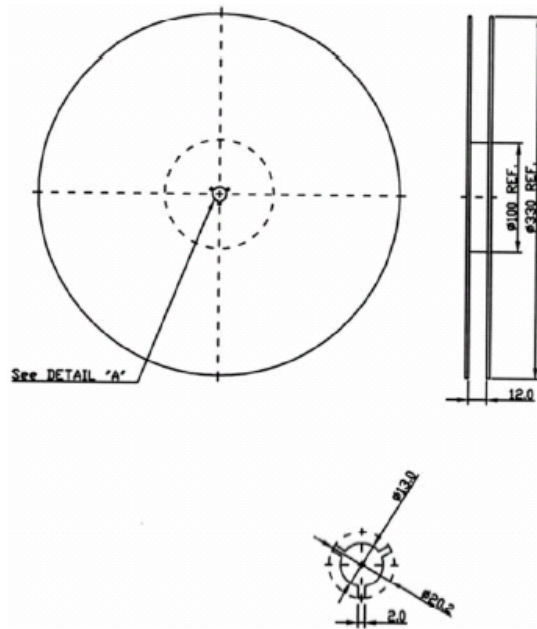

TAPE DIMENSION

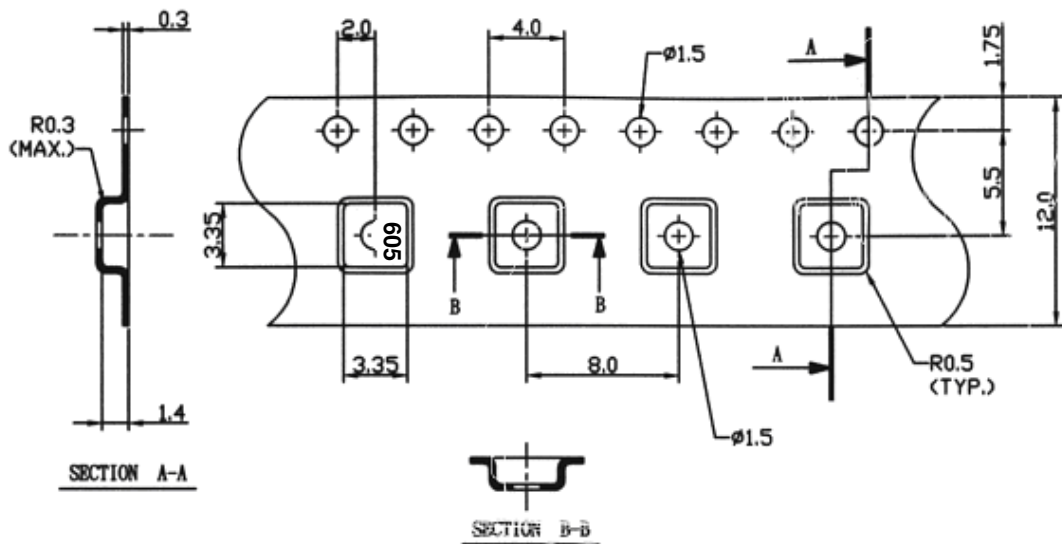

J.RECOMMENDED REFLOW PROFILE:

