



# TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,  
Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: [tstsales@mail.taisaw.com](mailto:tstsales@mail.taisaw.com) Web: [www.taisaw.com](http://www.taisaw.com)


## Product Specifications Approval Sheet


Product Description: SAW DPX 836.5 / 881.5 MHz Band 5 SMD 1.8X1.4 mm (BW=25 MHz)

TST Part No.: TF0123D

Customer Part No.: \_\_\_\_\_

Customer signature required
Company: _____
Division: _____
Approved by : _____
Date: _____

Checked by: \_\_\_\_\_ Anne Chen 

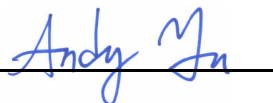Approved by: \_\_\_\_\_ Andy Yu 

Date: \_\_\_\_\_ 03,15,2019

1. Customer signed back is required before TST can proceed with sample build and receive orders.
2. Orders received without customer signed back will be regarded as agreement on the specifications.
3. Any specifications changes must be approved upon by both parties and a new revision of specifications shall be released to reflect the change



# TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,  
Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: [tstsales@mail.taisaw.com](mailto:tstsales@mail.taisaw.com) Web: [www.taisaw.com](http://www.taisaw.com)

SAW DPX 836.5/881.5 MHz Band 5 SMD 1.8X1.4 mm (BW=25 MHz)

MODEL NO.:TF0123D

REV.2.0

## A. MAXIMUM RATING:

1. Operating temperature range: -20 °C to +85 °C
2. Storage temperature range: -40 °C to +85 °C
3. Tx Input power : 29dBm (Ta=+50°C,50000h,CW)
4. Maximum DC Voltage: 0 V
5. Moisture Sensitivity Level: Level 3 (MSL 3)
6. ESD 100V(MM) 200V(HBM)

RoHS Compliant

Lead-free soldering

Electrostatic Sensitive Device (ESD)

## B. ELECTRICAL CHARACTERISTICS:

Terminating impedance (Tx Port): 50 Ω (Single-ended)

Terminating impedance (Rx Port): 50 Ω (Single-ended)

Terminating impedance (Ant Port): 50 Ω (Single-ended)

### Tx to ANT (f<sub>T0</sub>=836.5 MHz)

Parameters Description		Unit	Min	Typ	Max	Remarks
Insertion Loss	824 ~ 849 MHz	dB	-	1.8	2.5	
Amplitude ripple	824 ~ 849 MHz	dB	-	0.6	1.5	
VSWR	ANT	824 ~ 849 MHz	-	-	1.6	2.0
	Tx	824 ~ 849 MHz	-	-	1.65	2.0
<b>Attenuation:</b>						
10 ~ 420 MHz		dB	35	40	-	
420 ~ 494 MHz		dB	35	39	-	
494 ~ 701 MHz		dB	35	39	-	
699 ~ 716 MHz		dB	35	43	-	
701 ~ 728 MHz		dB	35	43		
704 ~ 716 MHz		dB	35	43	-	
728 ~ 764 MHz		dB	35	41	-	
764 ~ 804 MHz		dB	25	31	-	
860 ~ 869 MHz		dB	5	22	-	
869 ~ 894 MHz		dB	44	49		
1559 ~ 1563 MHz		dB	33	38		
1565.42 ~ 1573.37 MHz		dB	33	38		
1573.37 ~ 1577.47 MHz		dB	33	38		
1577.47 ~ 1585.42 MHz		dB	33	38		
1597.55 ~ 1605.89 MHz		dB	33	37		

1683 ~ 1708 MHz	dB	30	36		
1710 ~ 1785 MHz	dB	30	35		
1844.9 ~ 1879.9 MHz	dB	30	35		
1844.5 ~ 1919.6 MHz	dB	28	34		
1920 ~ 1980 MHz	dB	28	34		
2110 ~ 2170 MHz	dB	25	32		
2400 ~ 2494 MHz	dB	25	30		
3286 ~ 3406 MHz	dB	15	26		
4110 ~ 4255 MHz	dB	12	18		
4900 ~ 5950 MHz	dB	10	17		
6582 ~ 6802 MHz	dB	15	28		
7406 ~ 7651 MHz	dB	15	29		

**ANT to Rx (f<sub>T0</sub>=881.5 MHz)**

Parameters Description		Unit	Min	Typ	Max	Remarks
Insertion Loss	869 ~ 894 MHz	dB	-	1.9	2.5	
Amplitude ripple	869 ~ 894 MHz	dB	-	0.8	1.5	
VSWR	ANT	-		1.6	2.0	
	Rx	-		1.65	2.0	
<b>Attenuation:</b>						
10 ~ 477 MHz		dB	35	41	-	
45 MHz		dB	50	80	-	
447 ~ 824 MHz		dB	32	37		
779 ~ 804 MHz		dB	35	38		
824 ~ 849 MHz		dB	47	53	-	
1693 ~ 1743 MHz		dB	35	40	-	
1710 ~ 1785 MHz		dB	35	40		
1788 ~ 1788 MHz		dB	35	40		
1850 ~ 1920 MHz		dB	35	40		
1920 ~ 1980 MHz		dB	35	41		
1980 ~ 2400 MHz		dB	35	41		
2305 ~ 2315 MHz		dB	35	41		
2400 ~ 2500 MHz		dB	35	42		
2467 ~ 2494 MHz		dB	35	42		
2517 ~ 2592 MHz		dB	35	42		
2607 ~ 2682 MHz		dB	35	42		
3476 ~ 3576 MHz		dB	30	38		
4345 ~ 4470 MHz		dB	25	30		
4900 ~ 5950 MHz		dB	20	33		
5214 ~ 5364 MHz		dB	25	38		
6083 ~ 6258 MHz		dB	20	32		
6952 ~ 7152 MHz		dB	15	24		


**Tx to Rx**

Isolation	824 ~ 849 MHz	dB	50	55	-	
	869 ~ 894 MHz	dB	48	52	-	
	1574 ~ 1577 MHz	dB	40	62		
	1683 ~ 1708 MHz	dB	20	62		
	2462 ~ 2557 MHz	dB	20	66		


**Notes :** (1) With Matching Network

## C. FREQUENCY CHARACTERISTICS:


### Tx to Ant

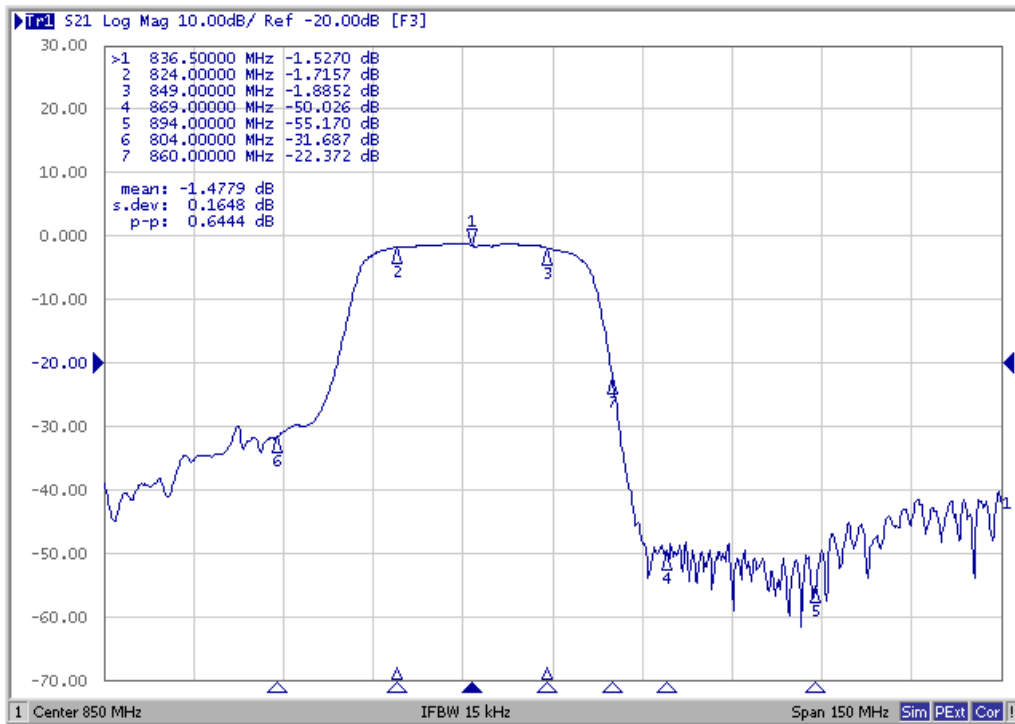


### Ant to Rx

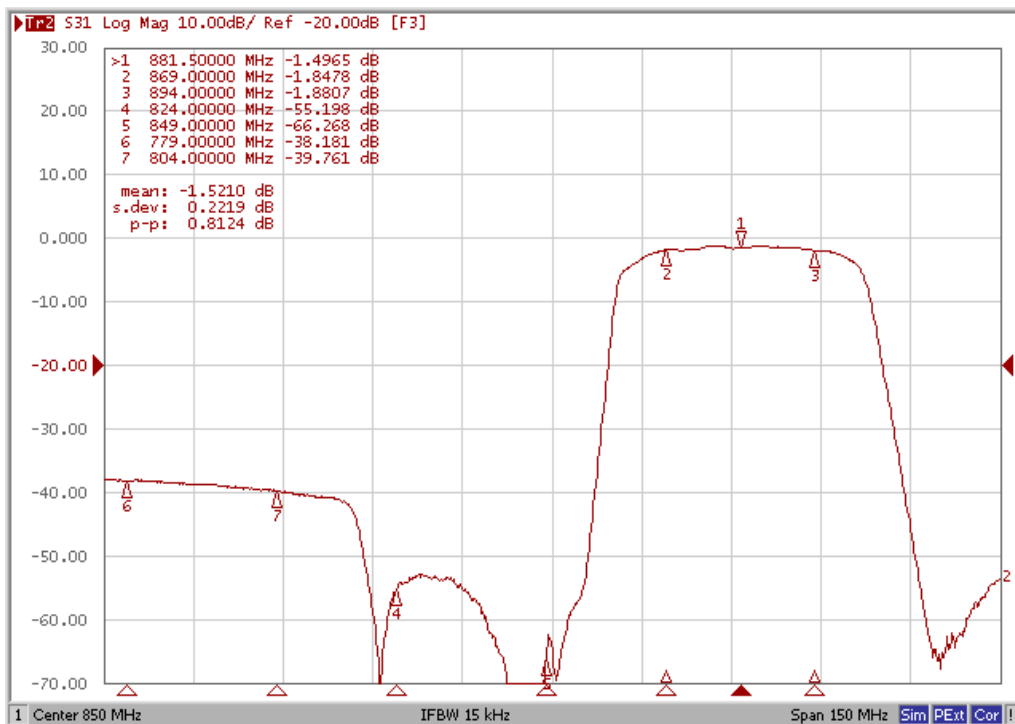


# Ripple Deviation

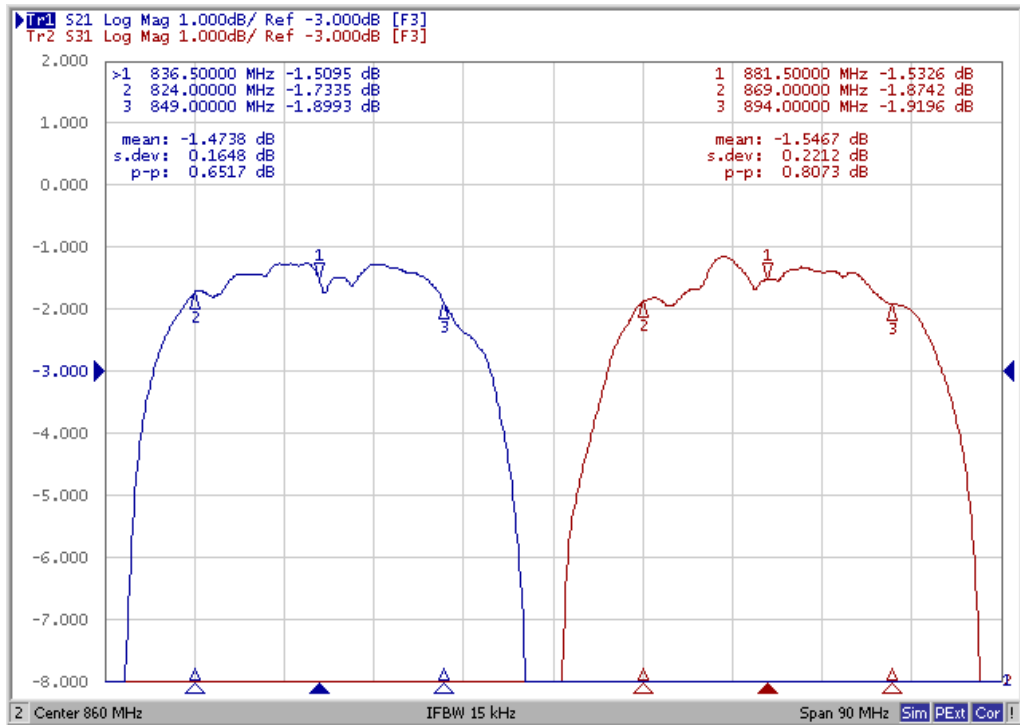


# Isolation

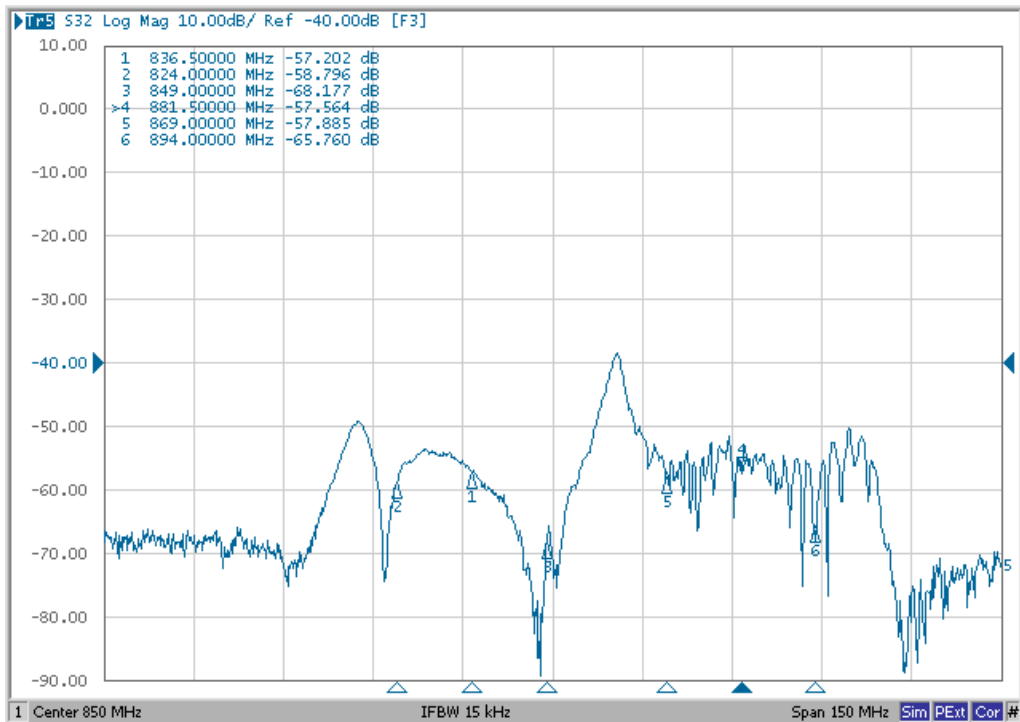


## VSWR (Tx Port)

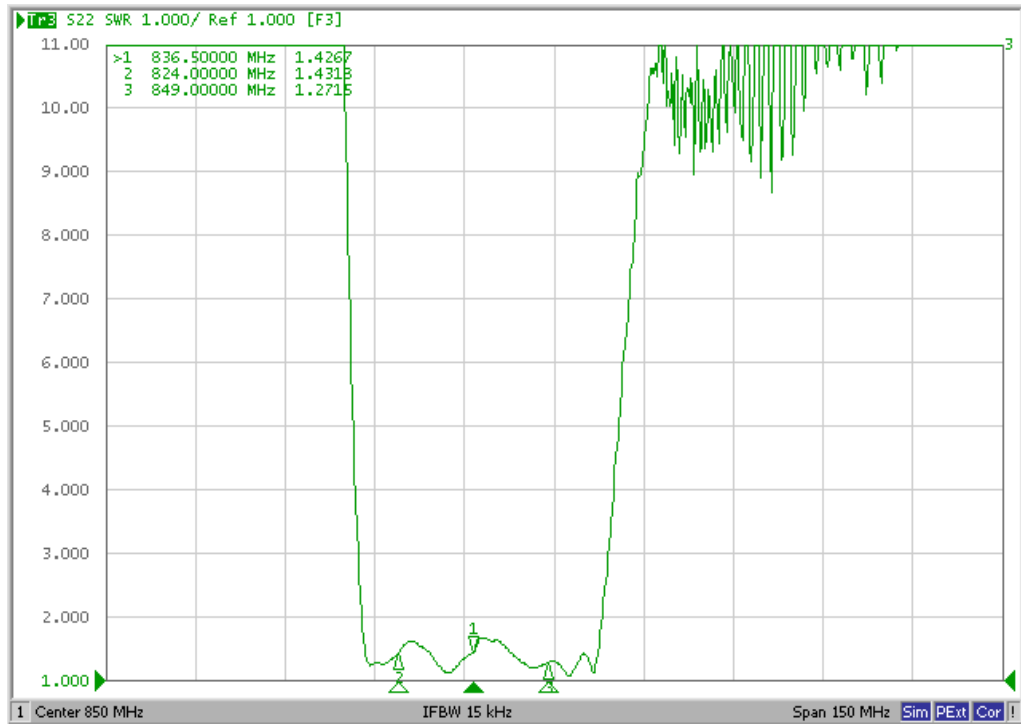


## Smith Chart (Tx Port)

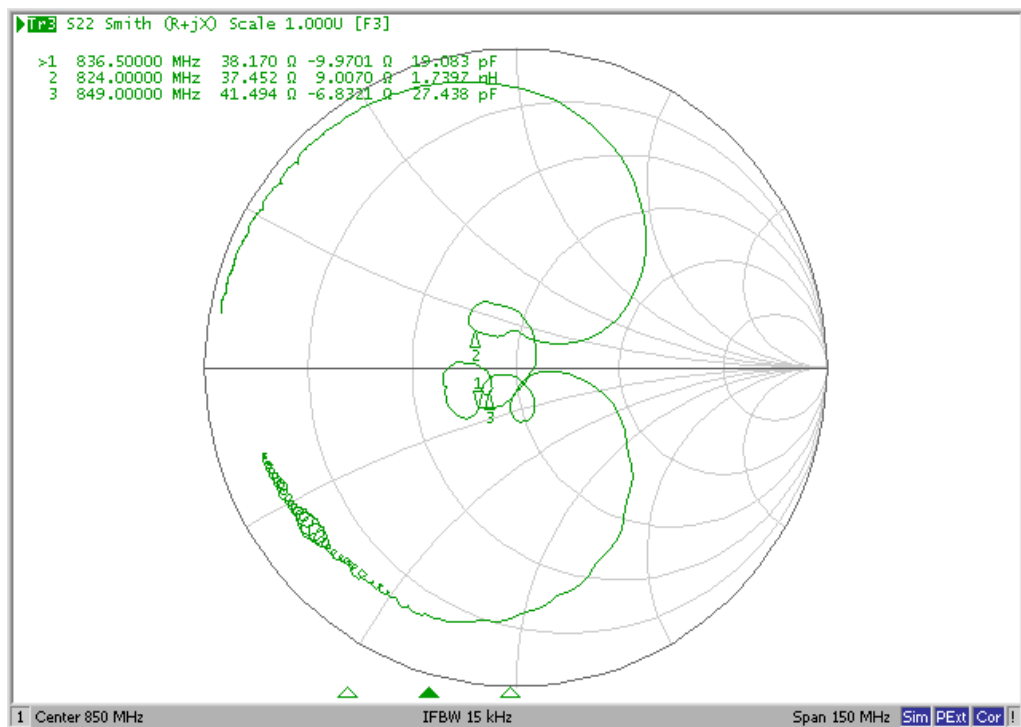

## VSWR (Rx Port)

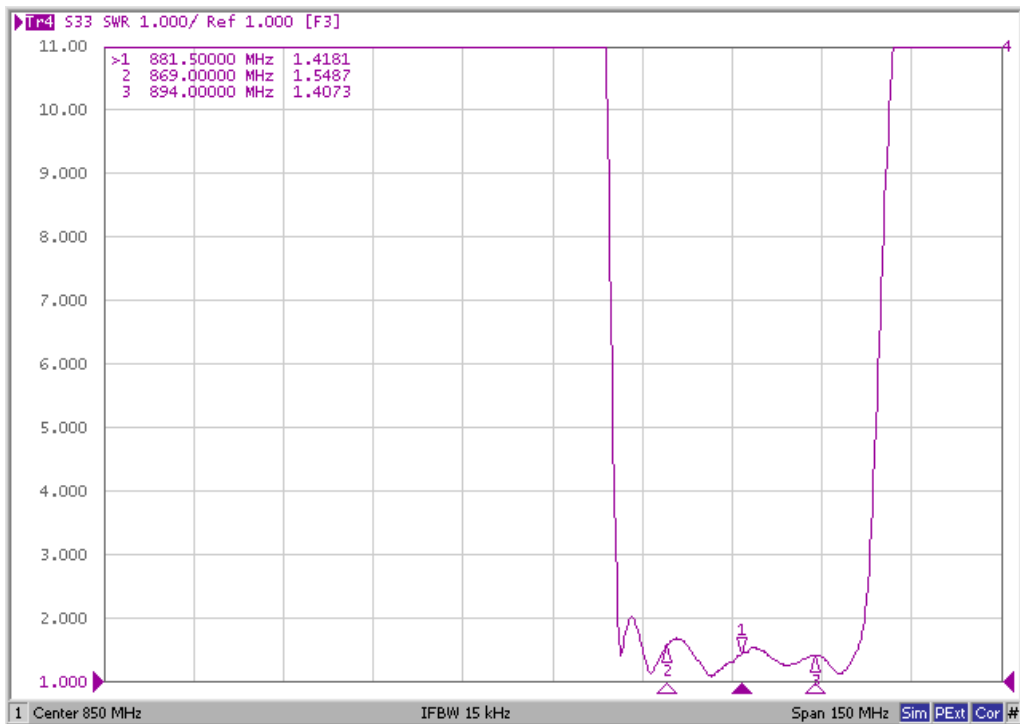


## Smith Chart (Rx Port)

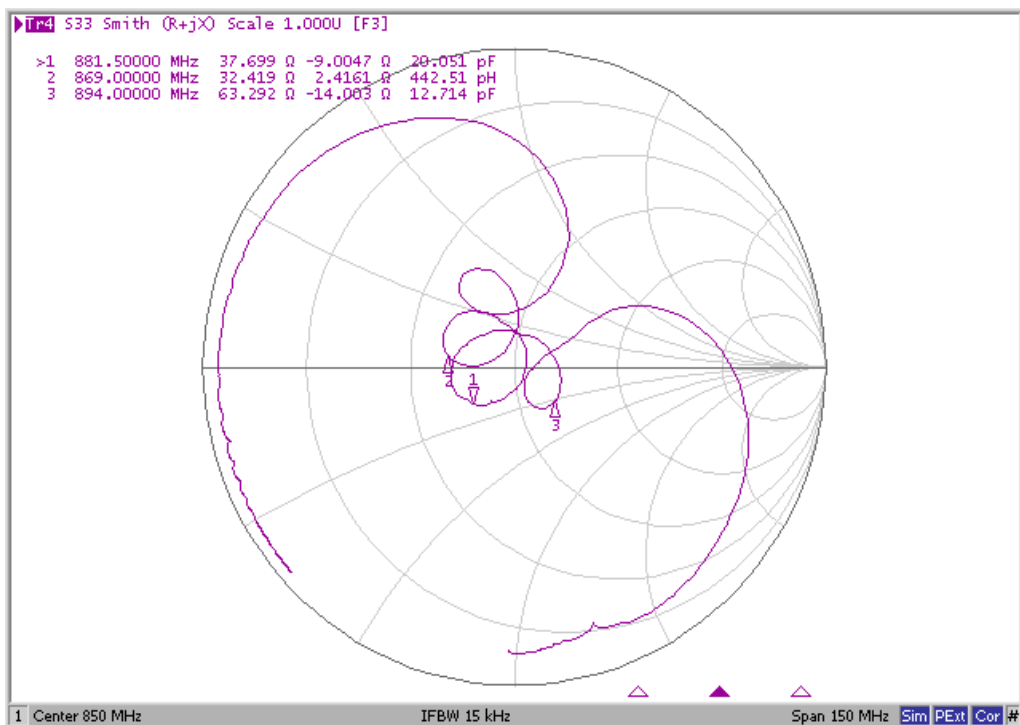




## VSWR (ANT Port)



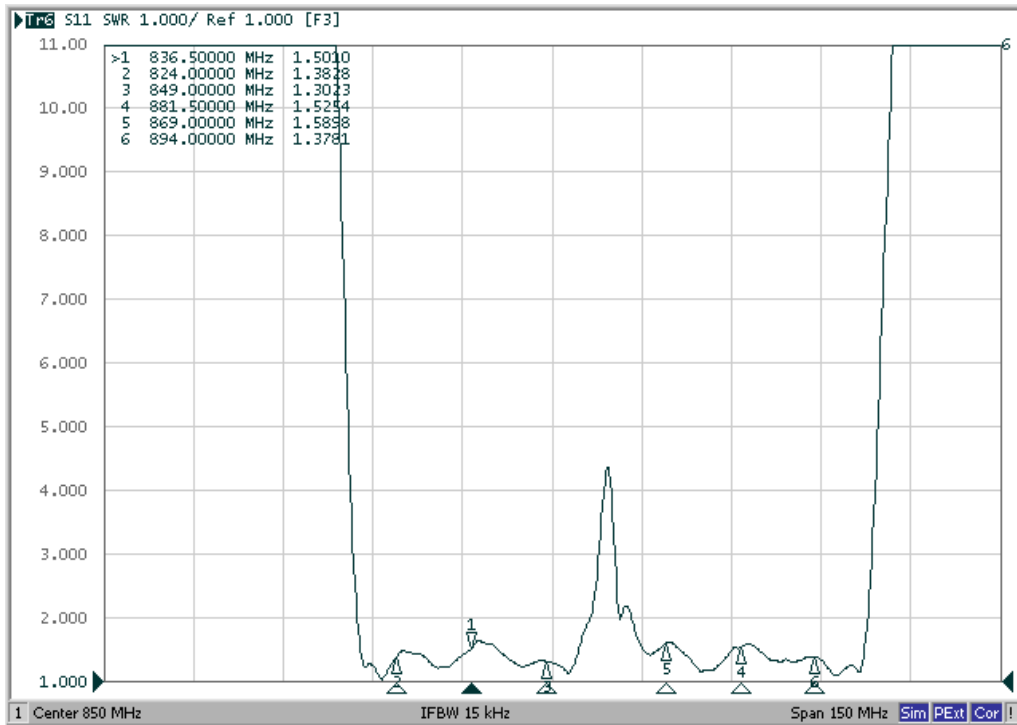


## Smith Chart (ANT Port)

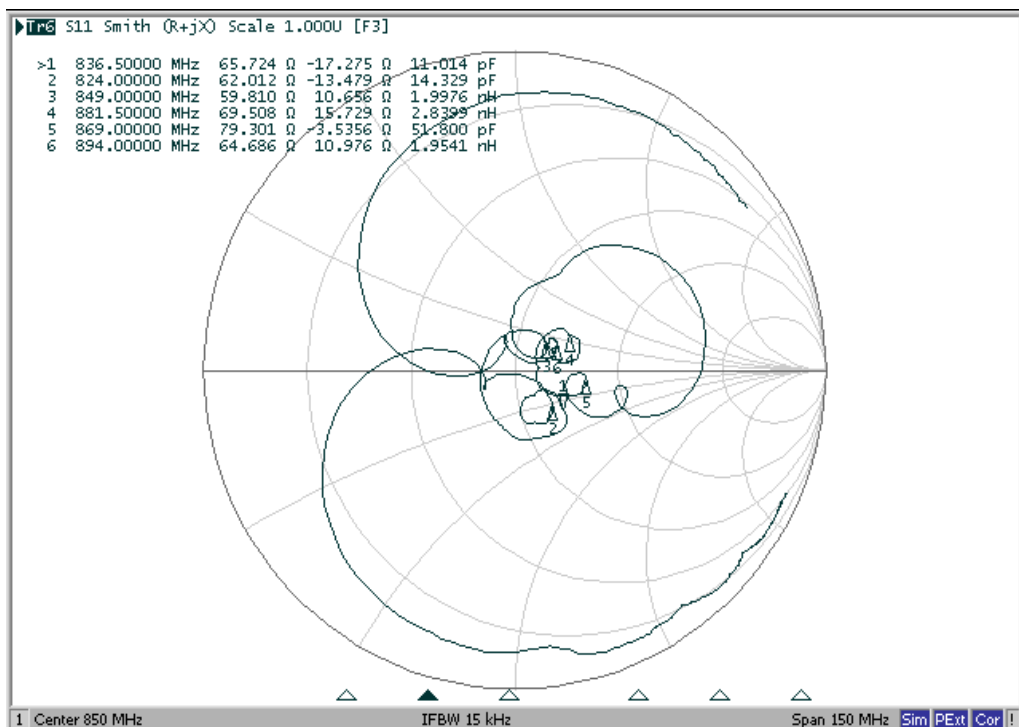


# Wide Span

## Wide Span

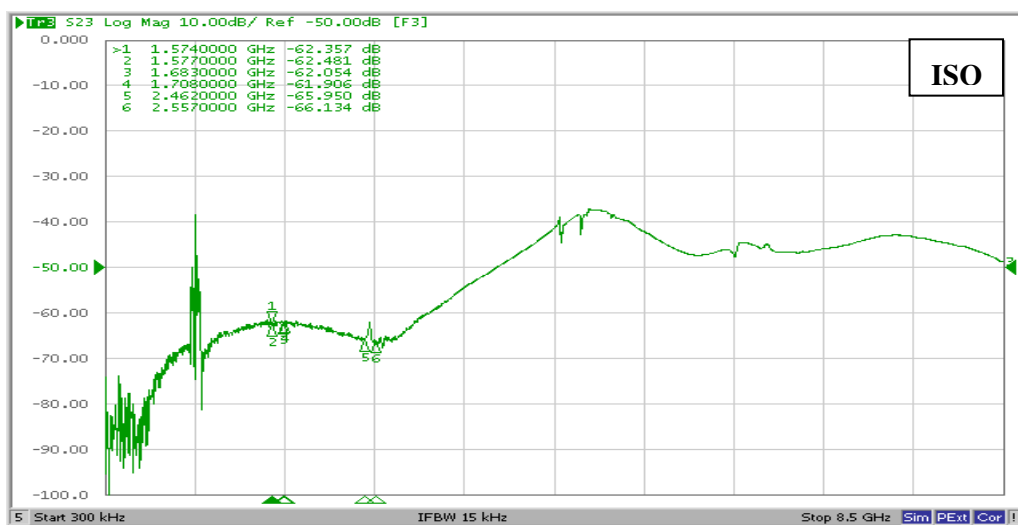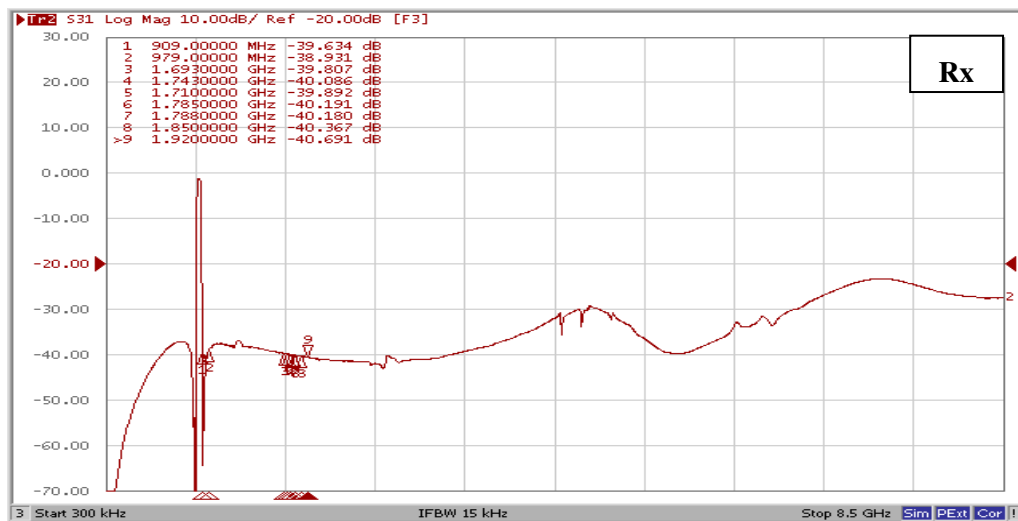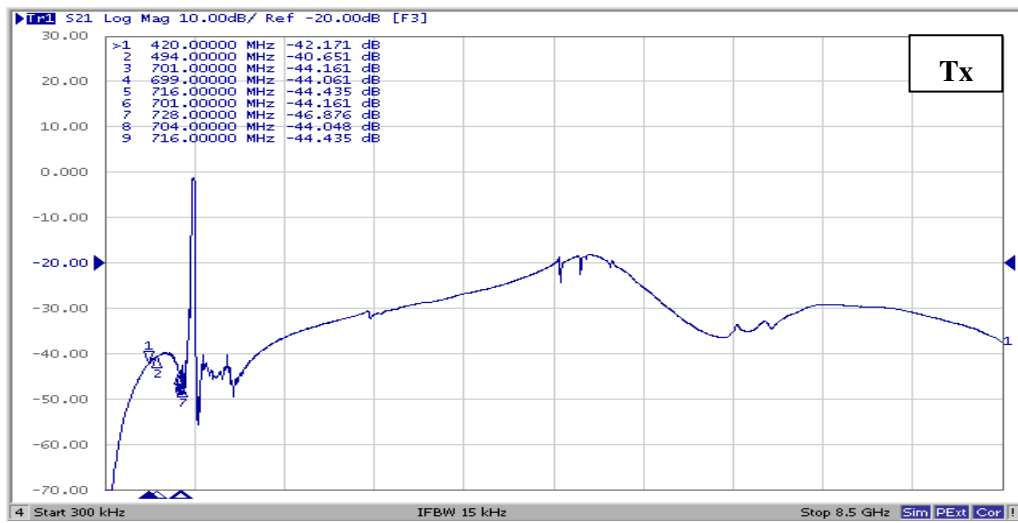

**D. OUTLINE DRAWIN:**

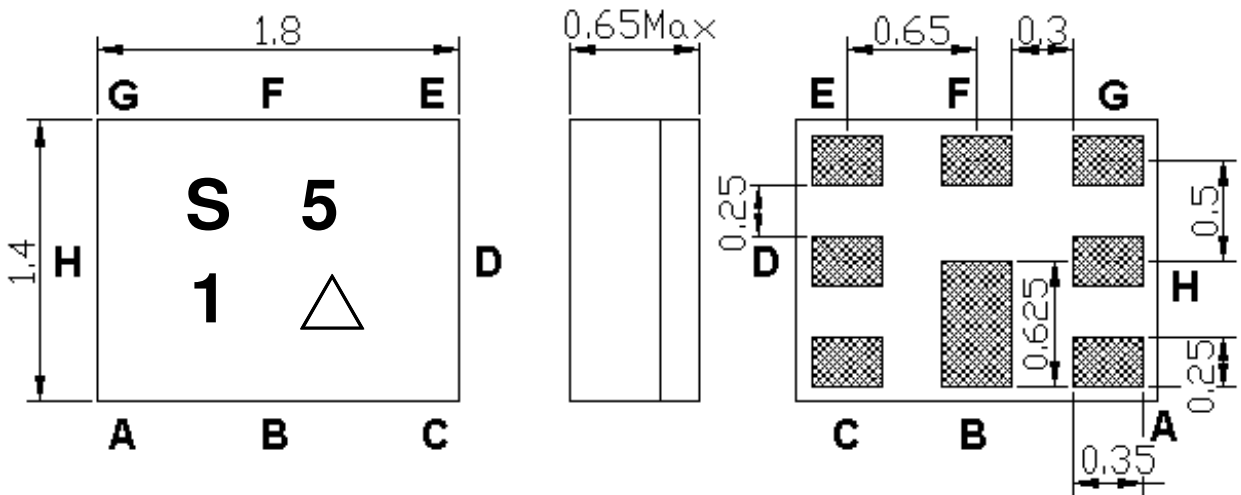


Marking Descriptions	
S	Marking name
5	Band Class
1	Series Number
△	Date Code(Year+Month)

Pin Description	
B,D,E,G,H	Ground
F	Ant
C	Tx (836.5MHz)
A	Rx (881.5MHz)


**Date Code ( year+month)**

Year	Jan.	Feb.	Mar.	Apr.	May.	Jun.	Jul.	Aug.	Sep.	Oct.	Nov.	Dec.
2013	A	B	C	D	E	F	G	H	J	K	L	M
2014	N	P	Q	R	S	T	U	V	W	X	Y	Z
2015	a	b	c	d	e	f	g	h	j	k	l	m
2016	n	p	q	r	s	t	u	v	w	x	y	z
2017	<u>A</u>	<u>B</u>	<u>C</u>	<u>D</u>	<u>E</u>	<u>F</u>	<u>G</u>	<u>H</u>	<u>J</u>	<u>K</u>	<u>L</u>	<u>M</u>
2018	<u>N</u>	<u>P</u>	<u>Q</u>	<u>R</u>	<u>S</u>	<u>T</u>	<u>U</u>	<u>V</u>	<u>W</u>	<u>X</u>	<u>Y</u>	<u>Z</u>
2019	<u>a</u>	<u>b</u>	<u>c</u>	<u>d</u>	<u>e</u>	<u>f</u>	<u>g</u>	<u>h</u>	<u>i</u>	<u>k</u>	<u>l</u>	<u>m</u>
2020	<u>n</u>	<u>p</u>	<u>q</u>	<u>r</u>	<u>s</u>	<u>t</u>	<u>u</u>	<u>v</u>	<u>w</u>	<u>x</u>	<u>y</u>	<u>z</u>

## E. Evaluation Circuit

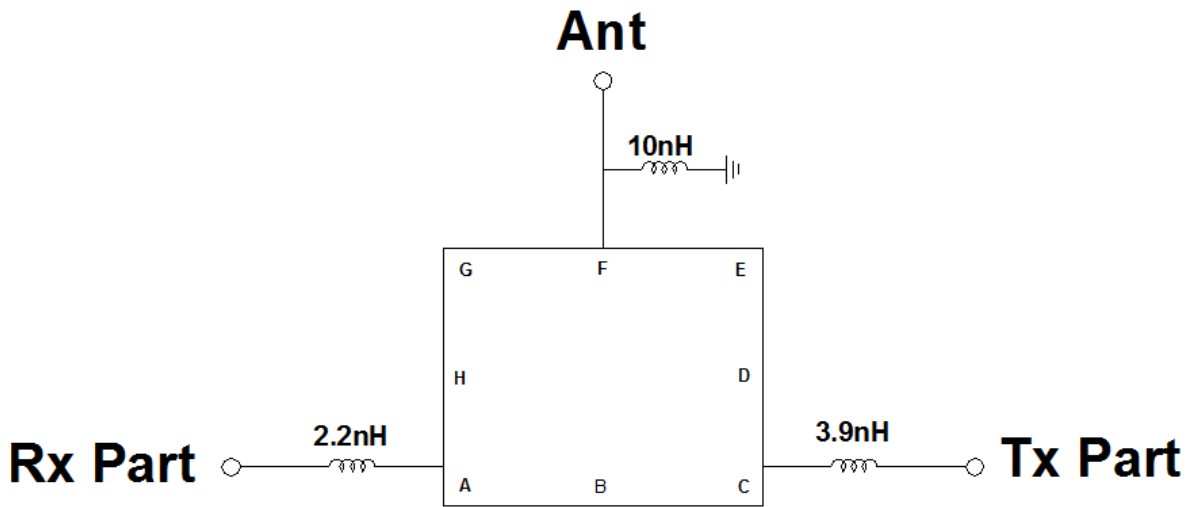


## F. FOOTPRINT:

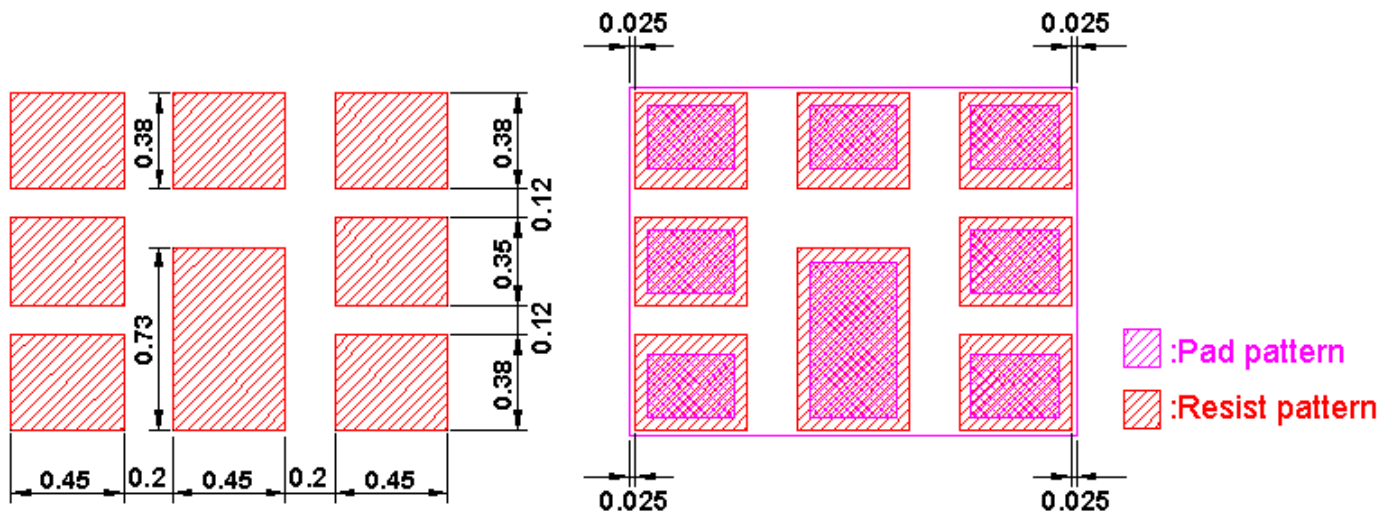

**G. PACKING:**

1. REEL DIMENSION

(Please refer to FR-75D10 for packing quantity)

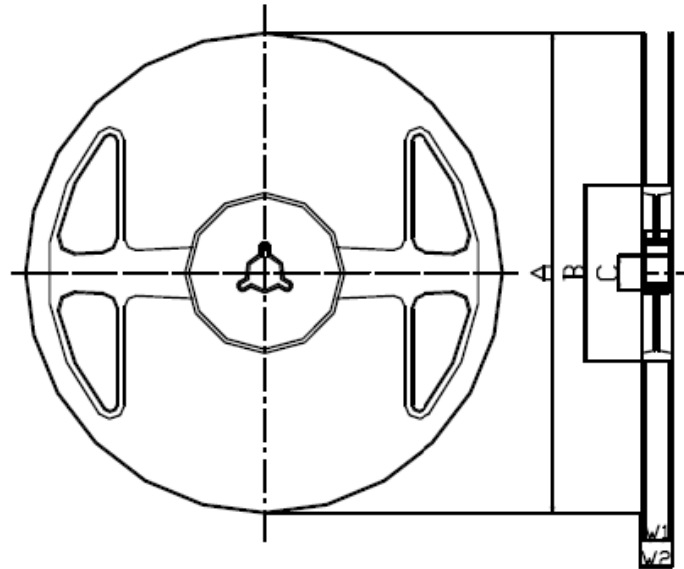

**Materials of Reel**

Material : Polystyrene + Carbon

Characteristics : Conforms to EIAJ-ET-7200A


Color : Black

Surface resistance (reference value) :  $10^9\Omega/\text{sq}$  Max.

Unit : mm

Code	Quantity	A	B	C	W1	W2
Z	3,000 pcs	$\phi 180.0 +0.0/-1.5$	$\phi 66.0 +/-0.5$	$\phi 13.0 +/-0.2$	$9.0 +1.0/-0.0$	$11.4 +/-1.0$

2. TAPE DIMENSION

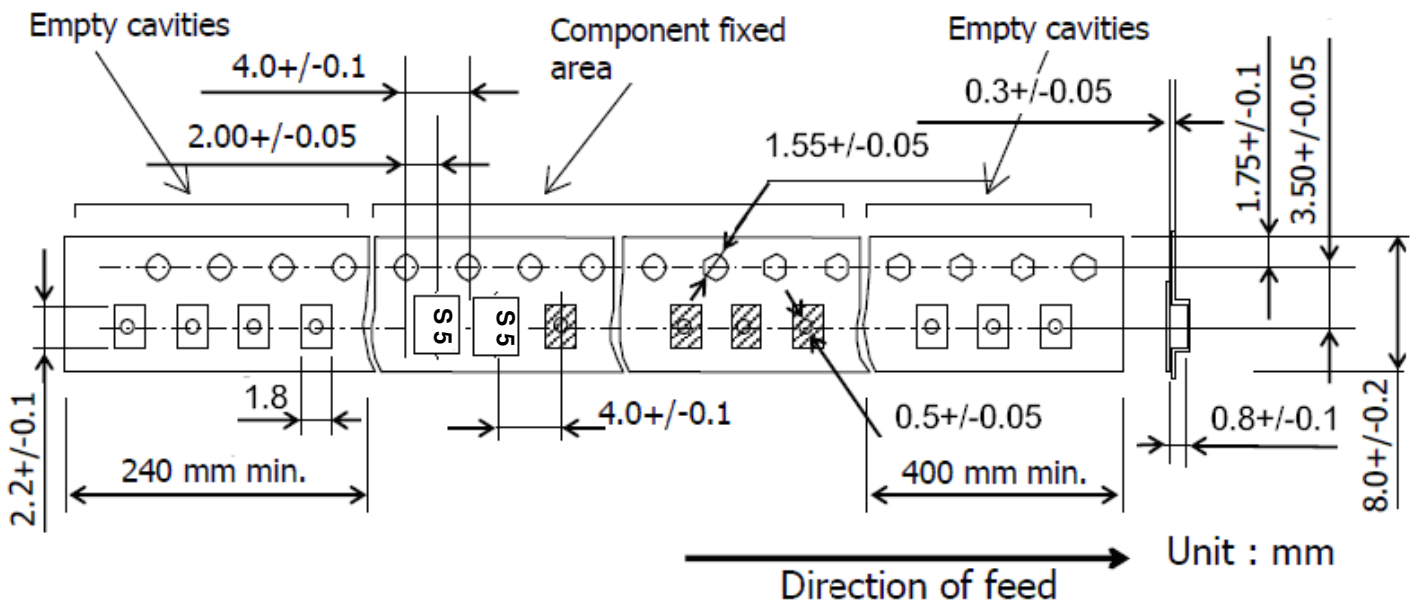

Unit : mm

## H. RECOMMENDED REFLOW PROFILE :

1. Preheating shall be fixed at 150~180°C for 60~90 seconds.
2. Ascending time to preheating temperature 150°C shall be 30 seconds min.
3. Heating shall be fixed at 220°C for 50~80 seconds and at 245~260°C peak (min. 10sec).
4. Time : 2 times.

