



TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,
Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: tstsales@mail.taisaw.com Web: www.taisaw.com

Product Specifications Approval Sheet

Product Name: SAW DPX 847 / 806MHz Band20 un-bal SMD1.8X1.4 mm (29.5MHz BW)

TST Parts No.: TF0168A

Customer Part No.: _____

Customer signature required
Company: _____
Division: _____
Approved by : _____
Date: _____

Checked by: _____ Anne Chen *Anne Chen*

Approved by: _____ Andy Yu *Andy Yu*

Date: _____ 2018.05.14

1. Customer signed back is required before TST can proceed with sample build and receive orders.
2. Orders received without customer signed back will be regarded as agreement on the specifications.
3. Any specifications changes must be approved upon by both parties and a new revision of specifications shall be released to reflect the change



TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,
Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: tstsales@mail.taisaw.com Web: www.taisaw.com

SAW DPX 847/806MHz Band20 Un-balanced SMD1.8X1.4 mm (29.5MHz BW)
MODEL NO.: TF0168A REV. No.: 1.0

A. MAXIMUM RATING:

1. Input power : 29dBm (Ta=+50deg C,50000h,CW)
2. Maximum DC Voltage: +/-5 V
3. Operating temperature range: -30 °C to +85 °C
4. Storage temperature range: -30 °C to +85 °C
5. Moisture Sensitivity Level: Level 1 (MSL 1)
6. ESD 100V(MM) 200V(HBM)

RoHS Compliant
Lead free
Lead-free soldering

Electrostatic Sensitive Device (ESD)

B. ELECTRICAL CHARACTERISTICS:

Terminating impedance(Tx Port): 50 Ω (Single-ended)

Terminating impedance(Rx Port): 50 Ω (Single-ended)

Terminating impedance(Ant Port): 50//10nH Ω (Single-ended)

Tx to ANT

Parameters Description		Unit	Minimum	Typical	Maximum	Note
Insertion Loss	832.25~ 861.75 MHz	dB(*1)	-	1.8	2.5	
Ripple	832~ 862 MHz	dB	-	1.0	1.8	
VSWR	ANT	-	-	1.6	2.0	
	Tx	-	-	1.7	2.0	
Attenuation:						
791.25 ~ 820.75 MHz		dB	45	54	-	-
1565 ~ 1606 MHz		dB	45	57	-	-
1664 ~ 1724 MHz		dB	40	55	-	-
2400 ~ 2586 MHz		dB	35	44	-	-

ANT to Rx

Parameters Description		Unit	Minimum	Typical	Maximum	Note
Insertion Loss	791.25 ~ 820.75 MHz	dB(*1)	-	1.8	3.0	
Ripple)	791~ 821 MHz	dB	-	0.9	2.3	
VSWR	ANT	791~ 821 MHz	-	-	1.7	2.3
	Rx		-	-	1.8	2.2
Attenuation:						
832.25 ~ 861.75 MHz		dB	45	53	-	-
1623 ~ 1683 MHz		dB	35	47	-	-
2400 ~ 2545 MHz		dB	30	43		


Tx to Rx

Isolation	832.25 ~ 861.75 MHz	dB	50	55	-	
	791.25 ~ 820.75 MHz	dB	53	56	-	


(*1) Specification of insertion loss excludes loss that comes from the test board.

C. Frequency Characteristics:


Tx to Ant

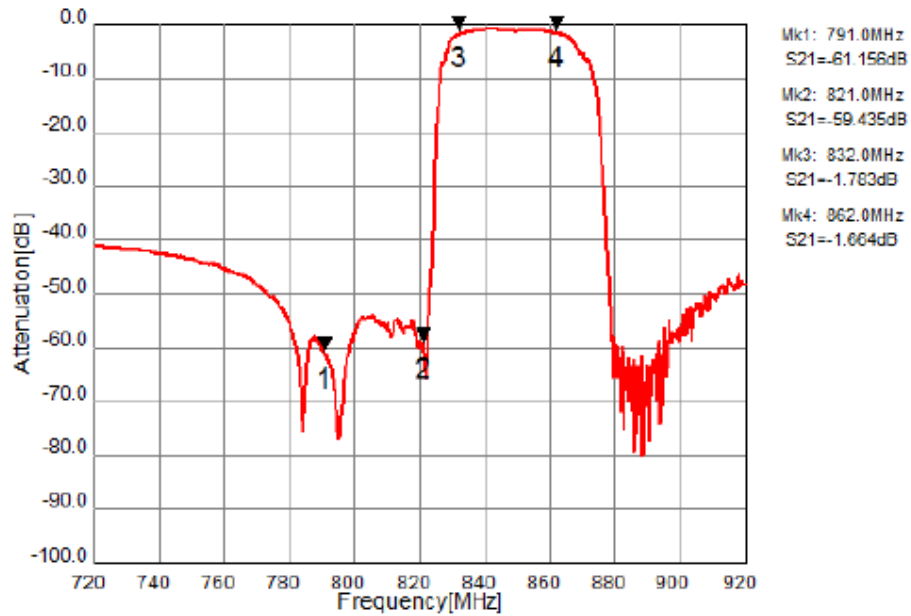


Ant to Rx

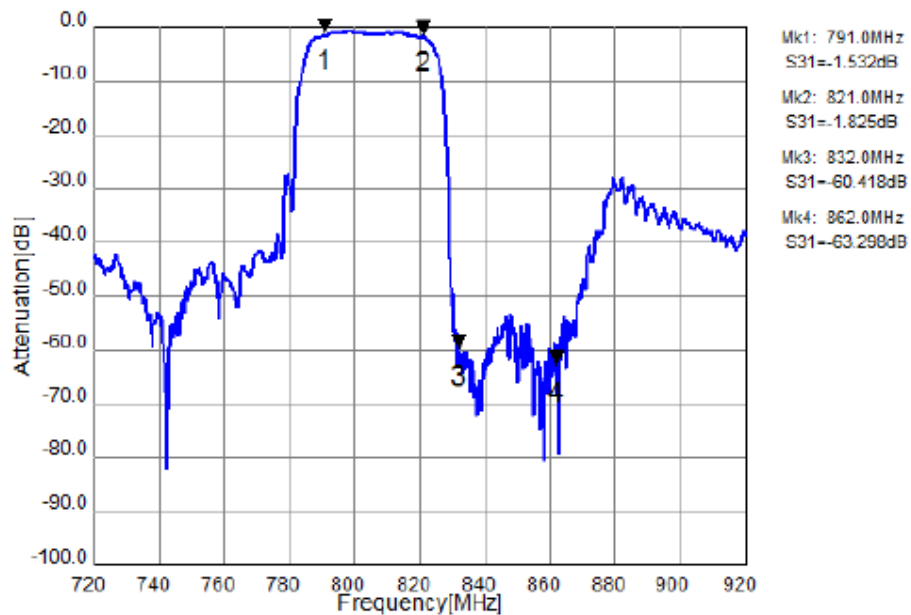



Ant to Rx, Tx to Ant

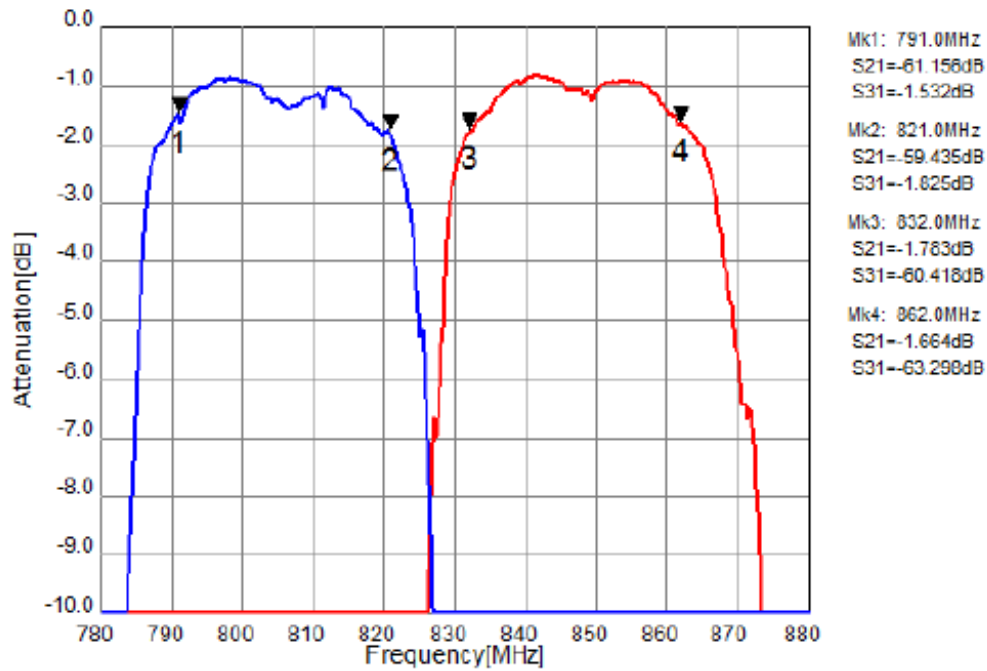



Tx to Rx Isolation

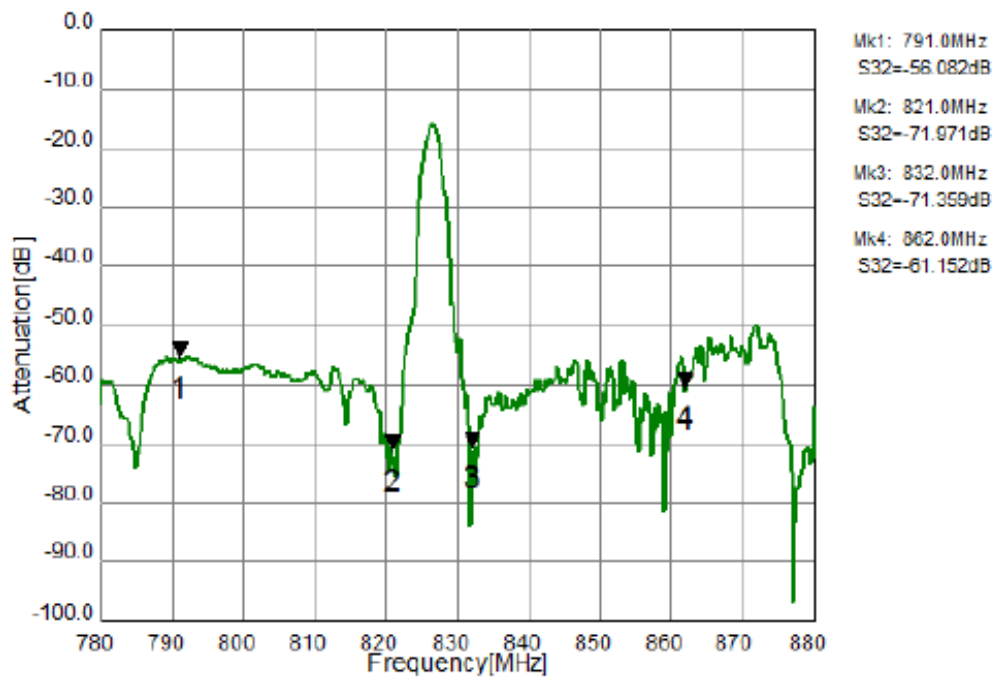



Tx Port

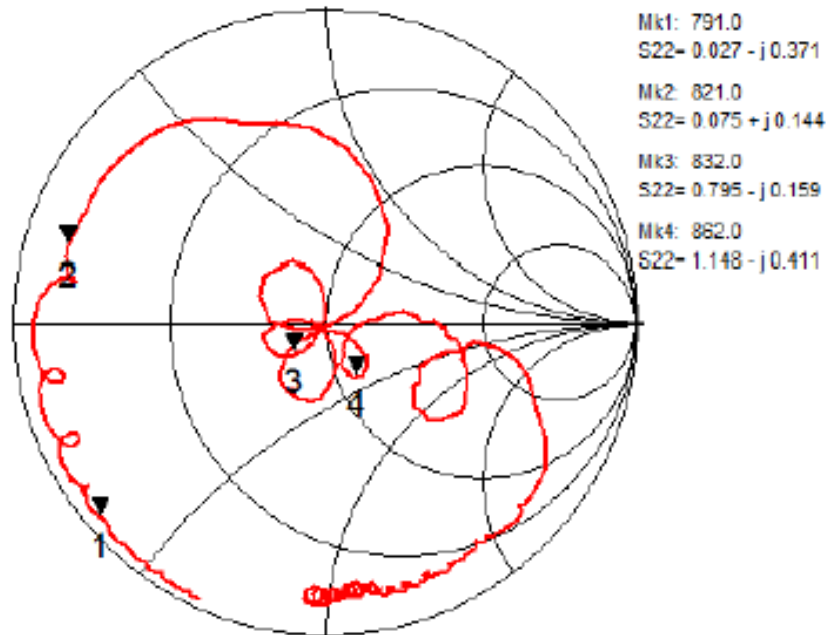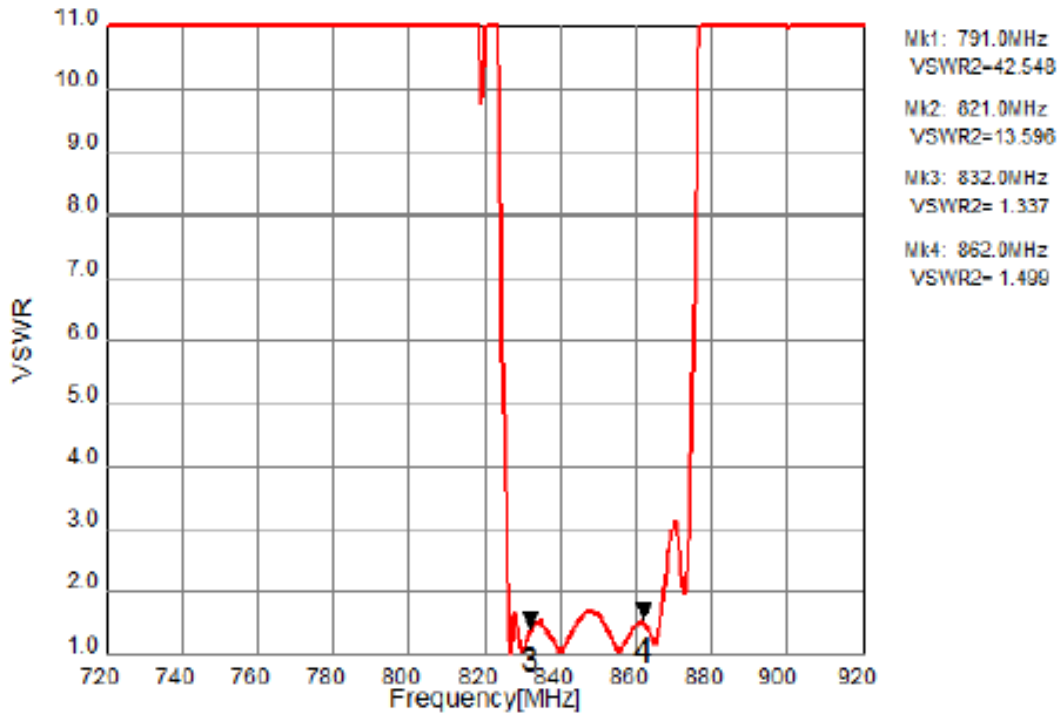


Rx Port

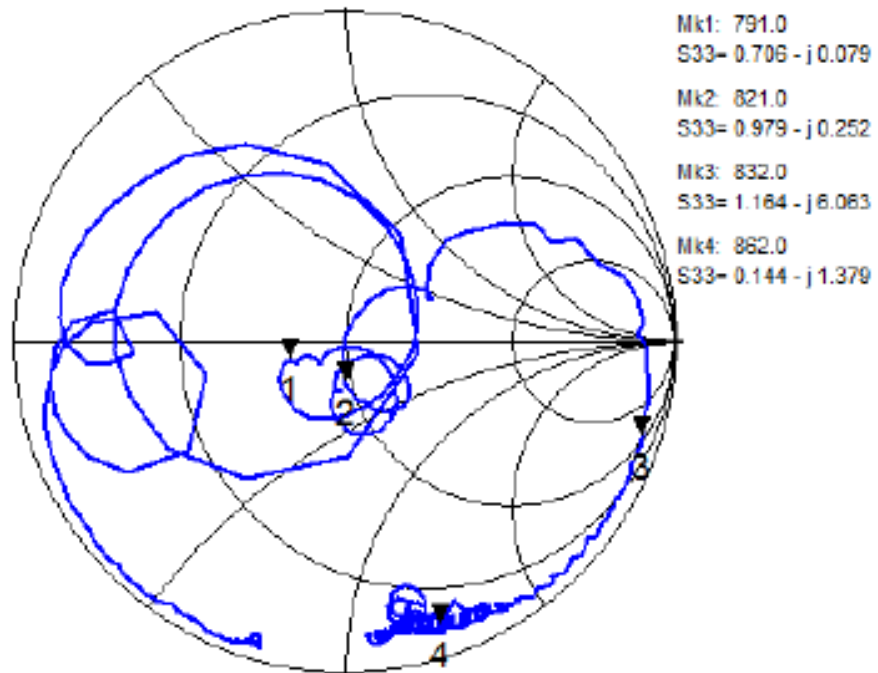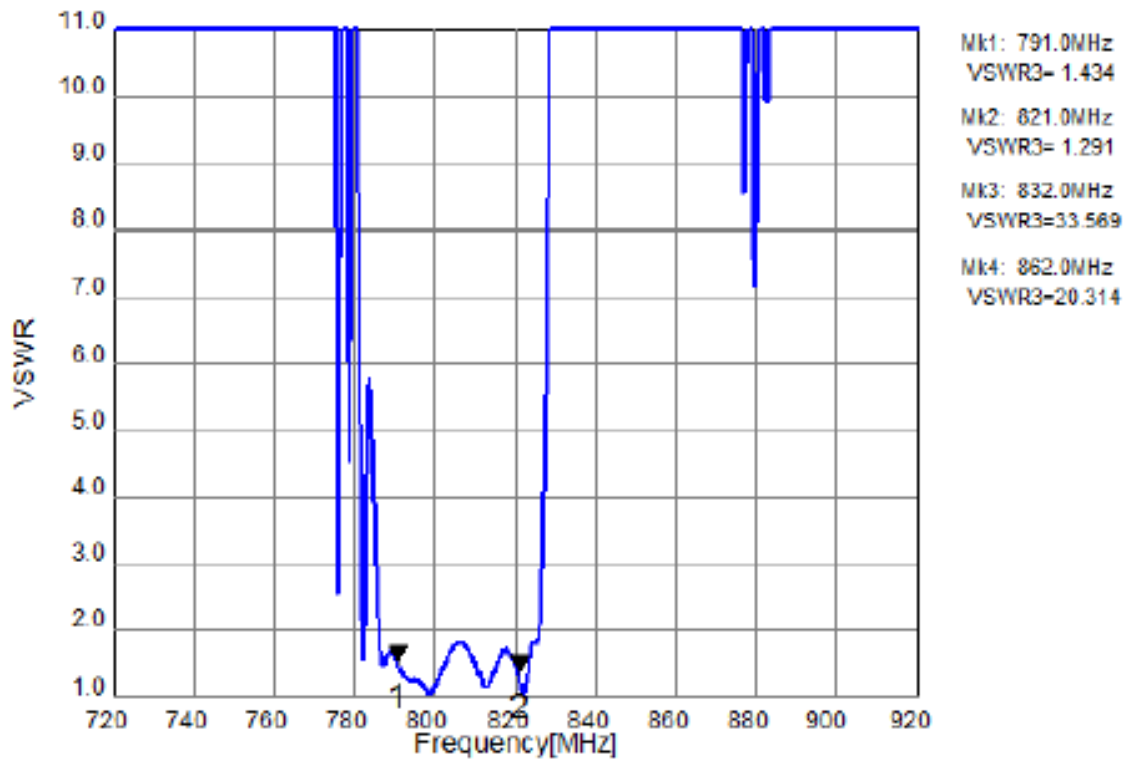


Ant Port

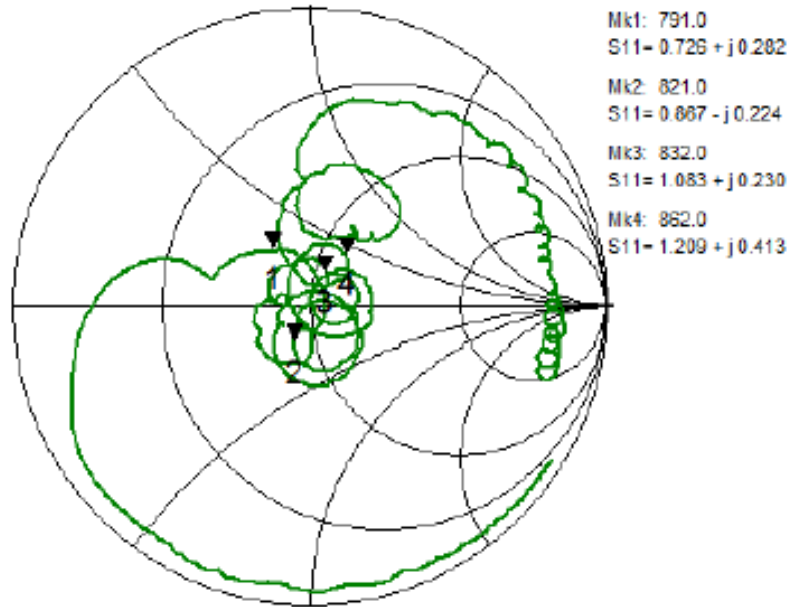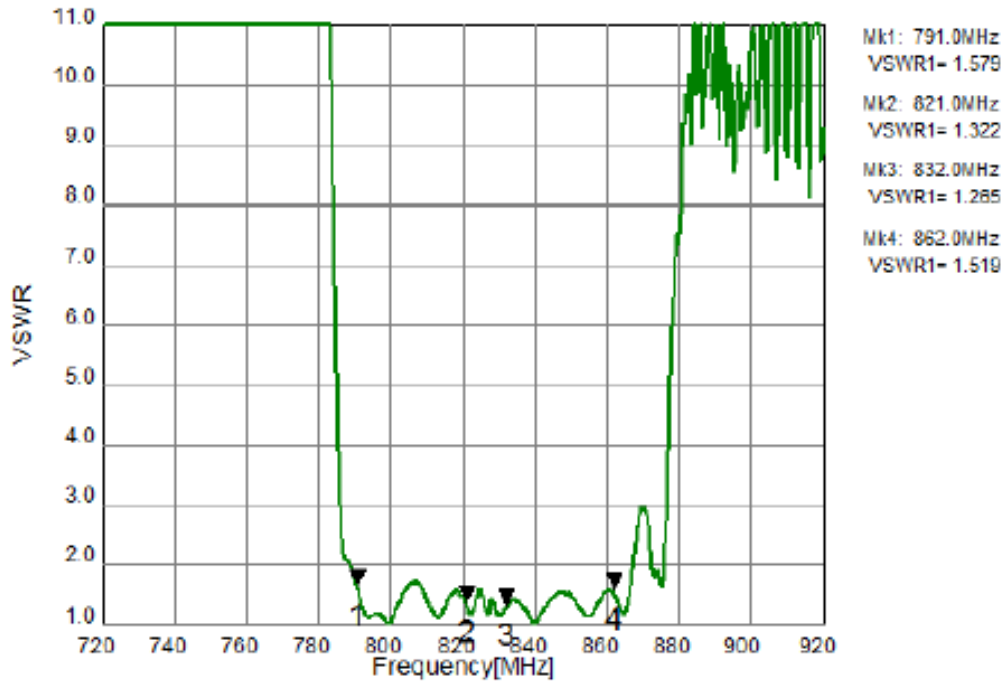


Tx to Ant (Wide span)

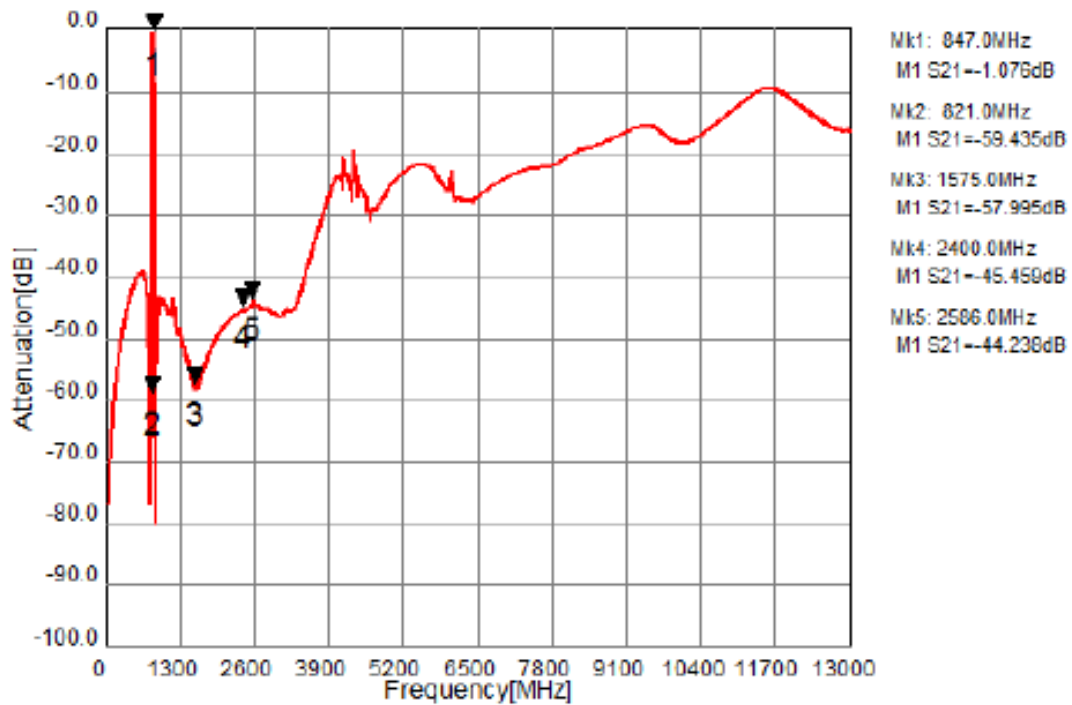

Ant to Rx (Wide span)

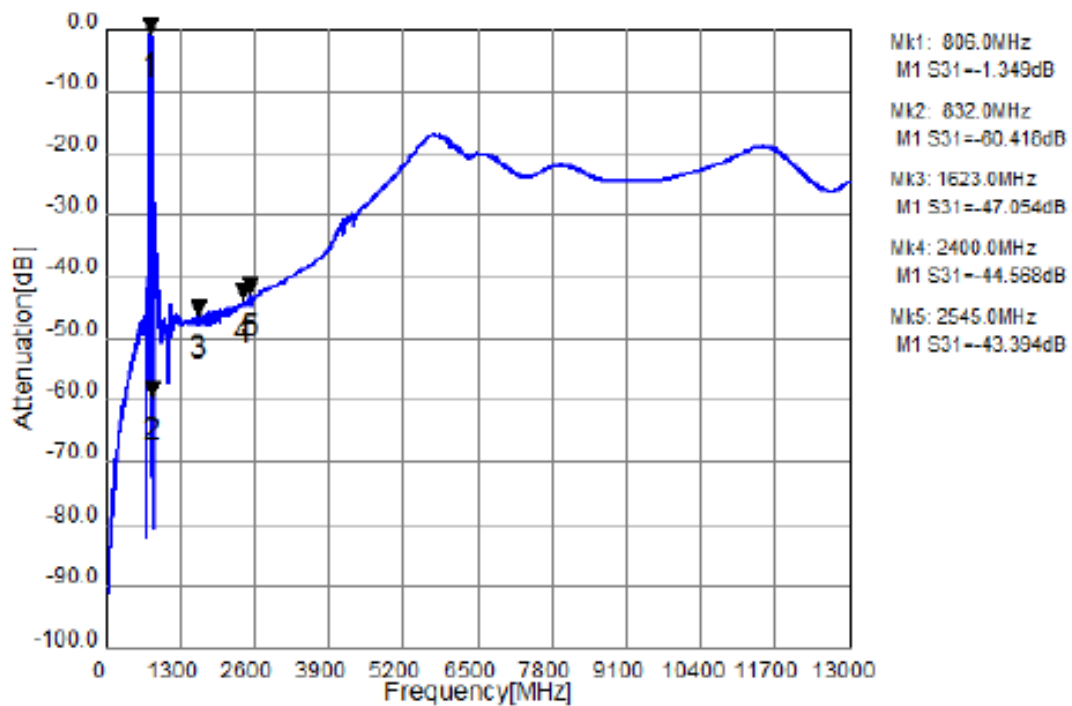

D. MEASUREMENT CIRCUIT:

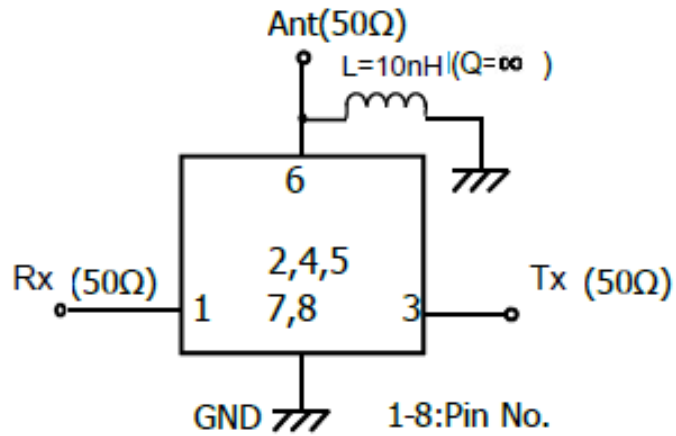

Recommended foot print pattern


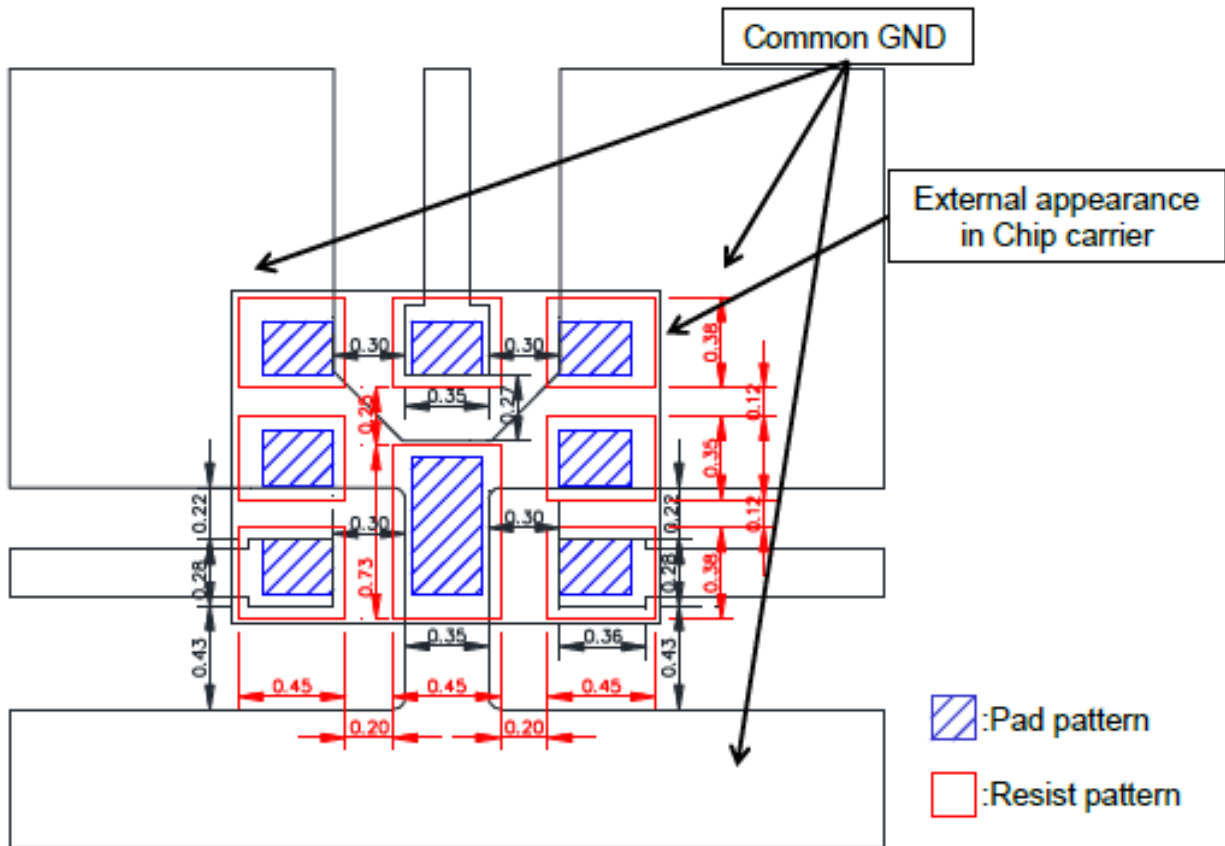


Figure 2. Recommended foot print pattern

E. OUTLINE DRAWING: (Mass Production)

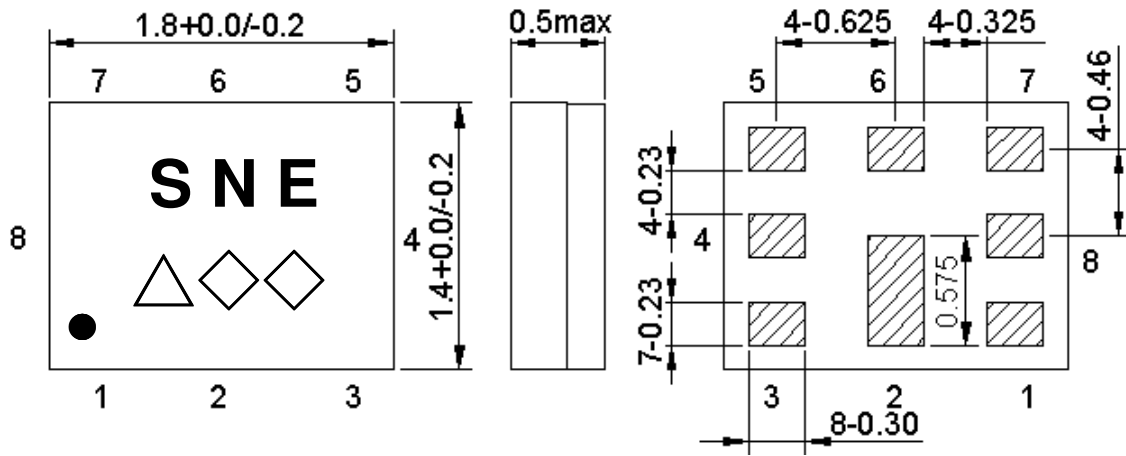

Marking name : NE

△: Date code(2016 May → s ,....., 2019 Dec→m.)

◇◇: Lot Code.


Product Date Code. Follow below table.

Year	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
2016	n	p	q	r	s	t	u	v	w	x	y	z
2017	A	B	C	D	E	F	G	H	J	K	L	M
2018	N	P	Q	R	S	T	U	V	W	X	Y	Z
2019	a	b	c	d	e	f	g	h	j	k	l	m

Pin Configuration

Pin No.	Pin name	Description
1	Rx	Receiver Pin
2	GND	Ground Pin
3	Tx	Transmitter Pin
4	GND	Ground Pin
5	GND	Ground Pin
6	ANT	Antenna Pin
7	GND	Ground Pin
8	GND	Ground Pin

Top View (Sample Production):

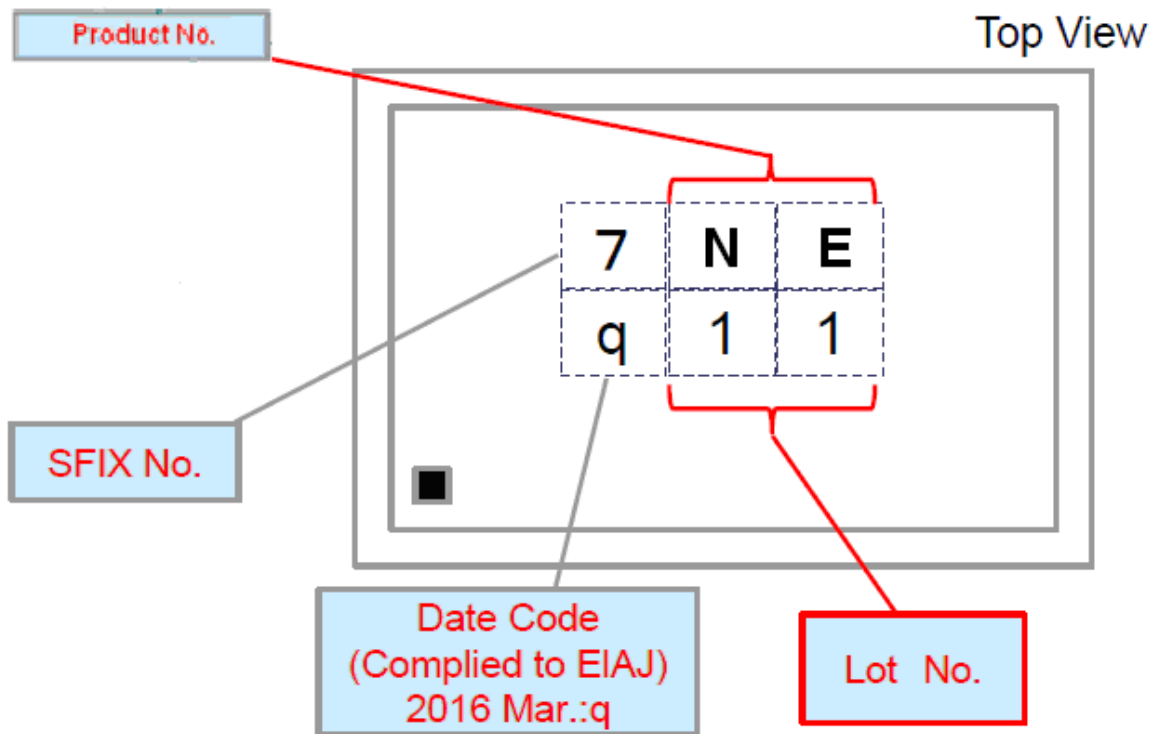


Lot No. is indicated by Arabic numerals 0 to 9 or characters A to Z and a to z (However, except I, O, l, l and o).


F. PACKING:

1. REEL DIMENSION

(Please refer to FR-75D10 for packing quantity)

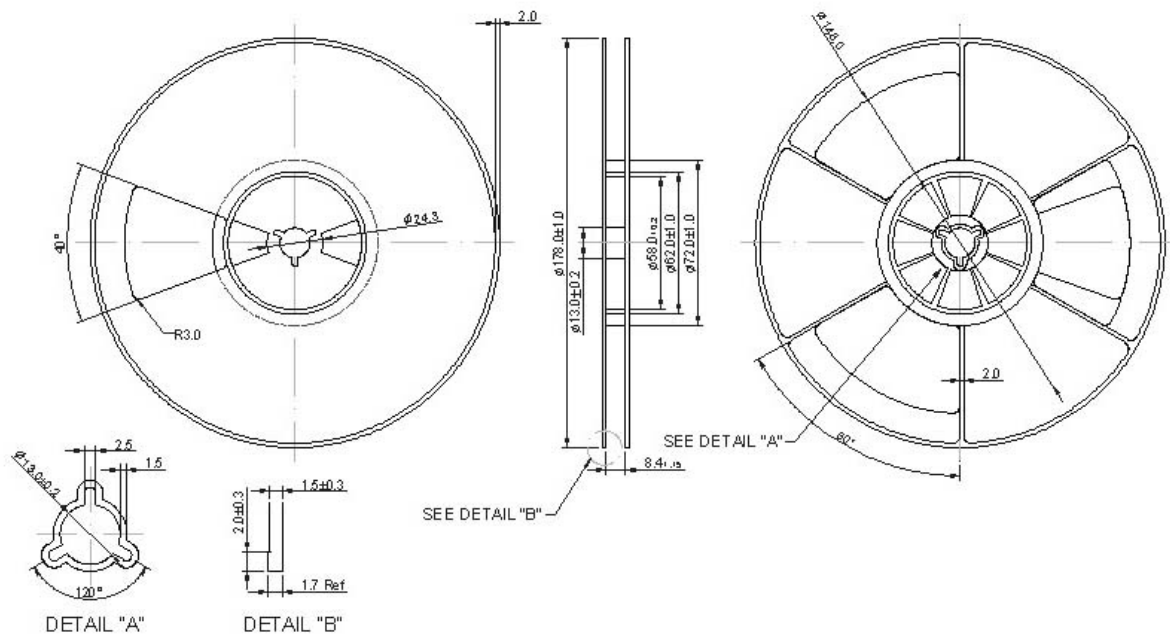

2.TAPE DIMENSION

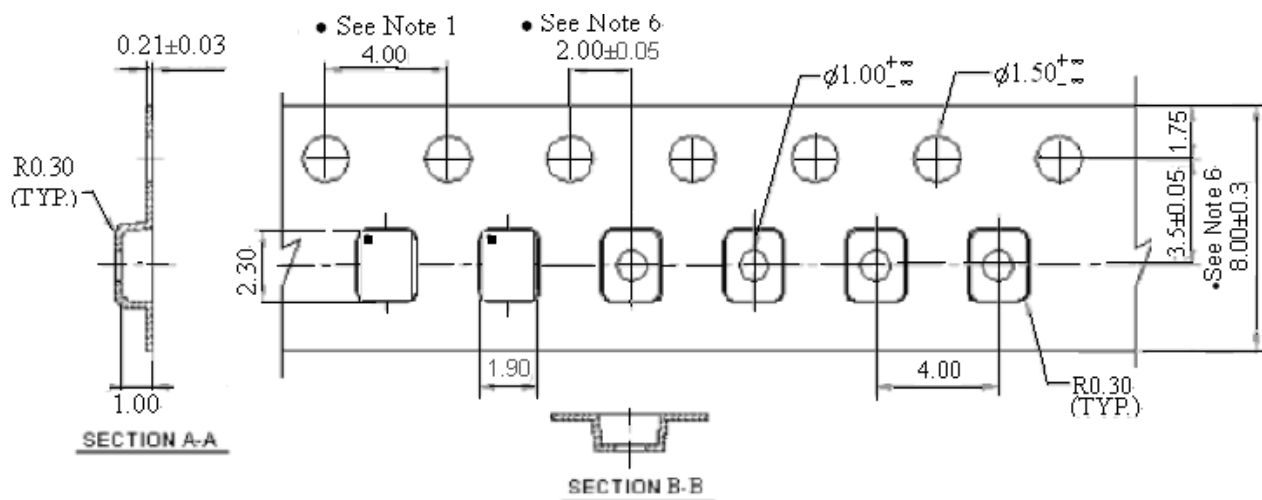

G. RECOMMENDED REFLOW PROFILE:

1. Preheating shall be fixed at 150~180°C for 60~90 seconds.
2. Ascending time to preheating temperature 150°C shall be 30 seconds min.
3. Heating shall be fixed at 220°C for 50~80 seconds and at 260°C +0/-5°C peak (20~40sec).
4. Time: 2 times.

