



TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,
Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: tstsales@mail.taisaw.com Web: www.taisaw.com

Product Specifications Approval Sheet

Product Name: Patch Antenna with PCB 915MHz (BW=10MHz) size
47.5x47.5mm

TST Parts No.: TQ0001A

Vendor Parts No.: _____

<p>Company: _____</p> <p>Division: _____</p> <p>Approved by : _____</p> <p>Date: _____</p>
--

Checked by: _____ Hong Pu Lin *Hong Pu Lin*

Approval by: _____ Andy Yu *Andy Yu*

Date: _____ 2019/01/25

1. Customer signed back is required before TST can proceed with sample build and receive orders.
2. Orders received without customer signed back will be regarded as agreement on the specifications.
3. Any specifications changes must be approved upon by both parties and a new revision of specifications shall be released to reflect the changes



TAI-SAW TECHNOLOGY CO., LTD.

No.3, Industrial 2nd Rd., Ping-Chen Industrial District, Taoyuan, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: tstsales3@mail.taisaw.com Web: www.taisaw.com

Patch Antenna with PCB 915MHz

MODEL NO.: TQ0001A

REV. NO.1

A. MAXIMUM RATING:

1. Operating temperature range: -40°C to 105°C
2. Storage temperature range: -40°C to 105°C
3. Moisture Sensitivity Level: Level 1(MSL1)




Electrostatic Sensitive Device

B. CHARACTERISTICS:


Parameter	Unit	Typ.
Center Frequency (Without PCB)	MHz	912MHz ± 3MHz
Center Frequency (With PCB)	MHz	914MHz ± 3MHz
Bandwidth	MHz	10MHz min
VSWR	dB	2.0 Max
Polarization		RHCP
impedance	Ohm	50
Frequency Temperature Coefficient(TF)	ppm/°C	20
Dimension	mm	Patch Antenna : 47.5X47.5X6.5mm PCB: 49.5X49.5mm

C. OUTLINE DRAWING:

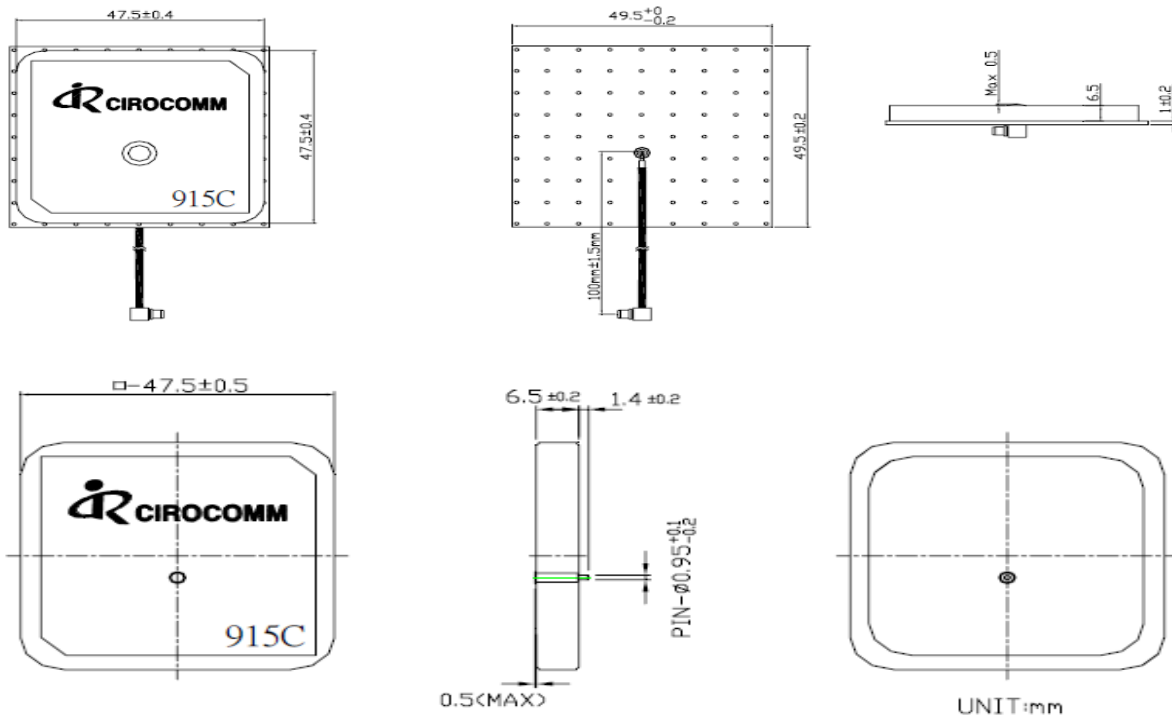


D. FREQUENCY CHARACTERISTICS :


S11 Return Loss Measurement in free space

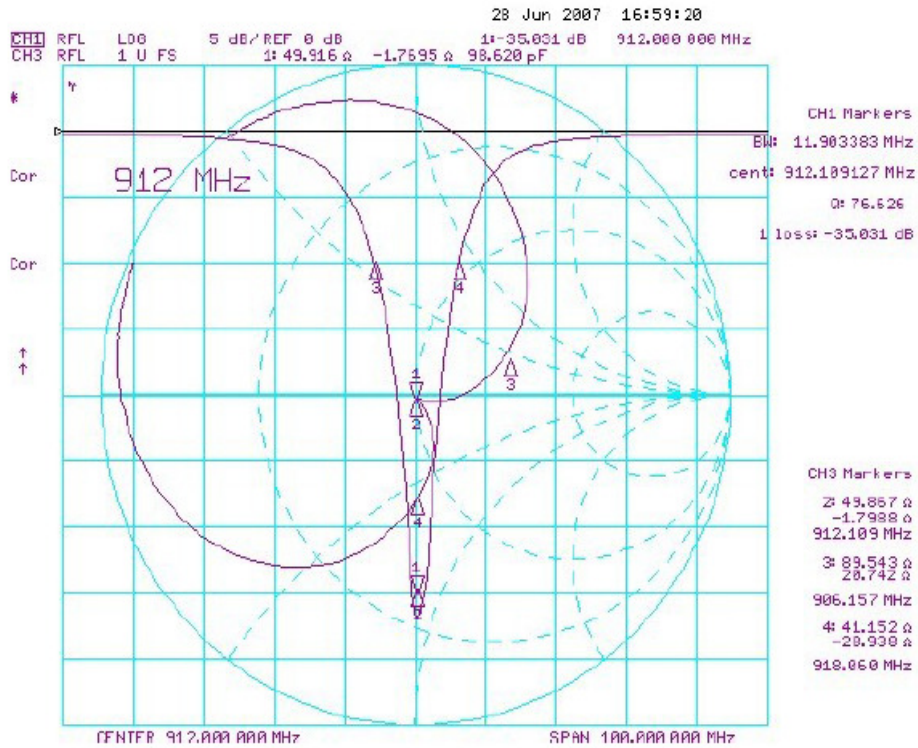

S11 Return Loss With PCB Board On GND Plane

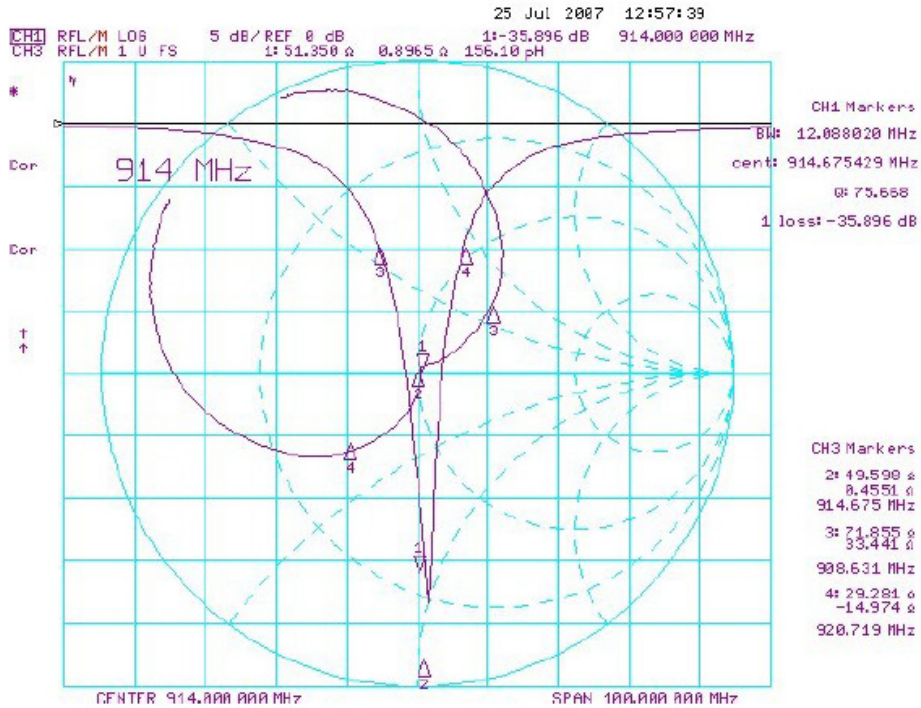

E. TAPE DIMENSION:


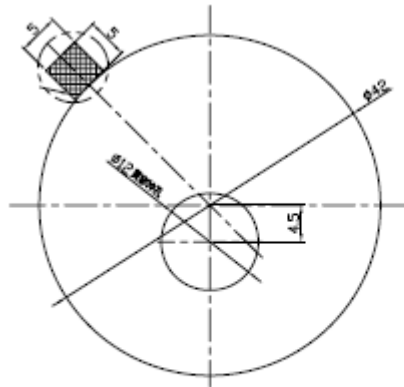


- 1. NITTO : NO.5015
- 2. Double-coated adhesive tape for industrial use
- 3. Thickness : 0.12mm
- 4. ±0.2


F. MARK:



G. TEST FIXTURE:

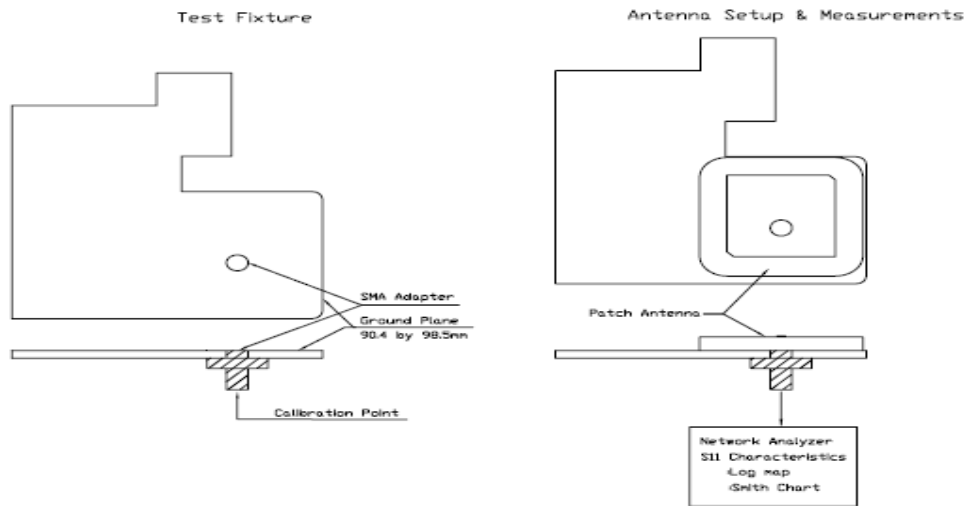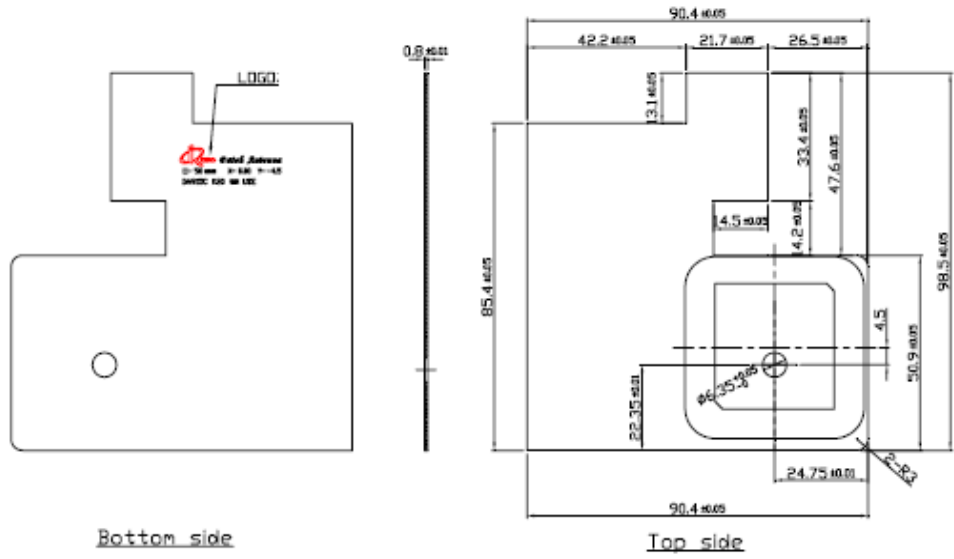

(With PCB)

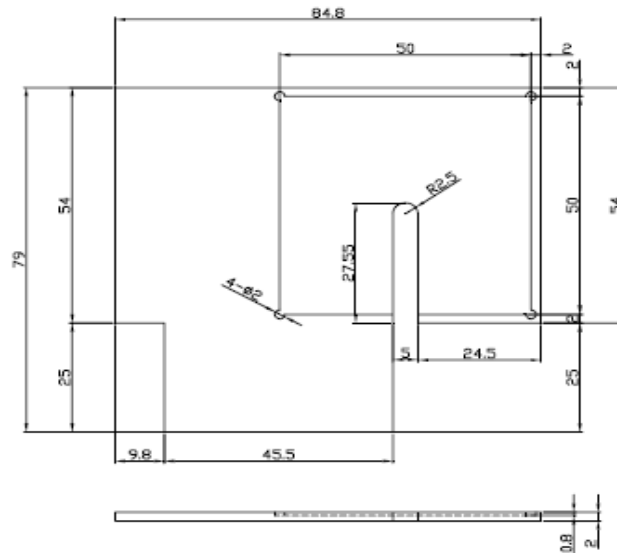


H. LAYOUT DIMENSION:



TOL: ± 0.20
 UNIT: mm

I. DA PACKAGE DISASSEMBLY:

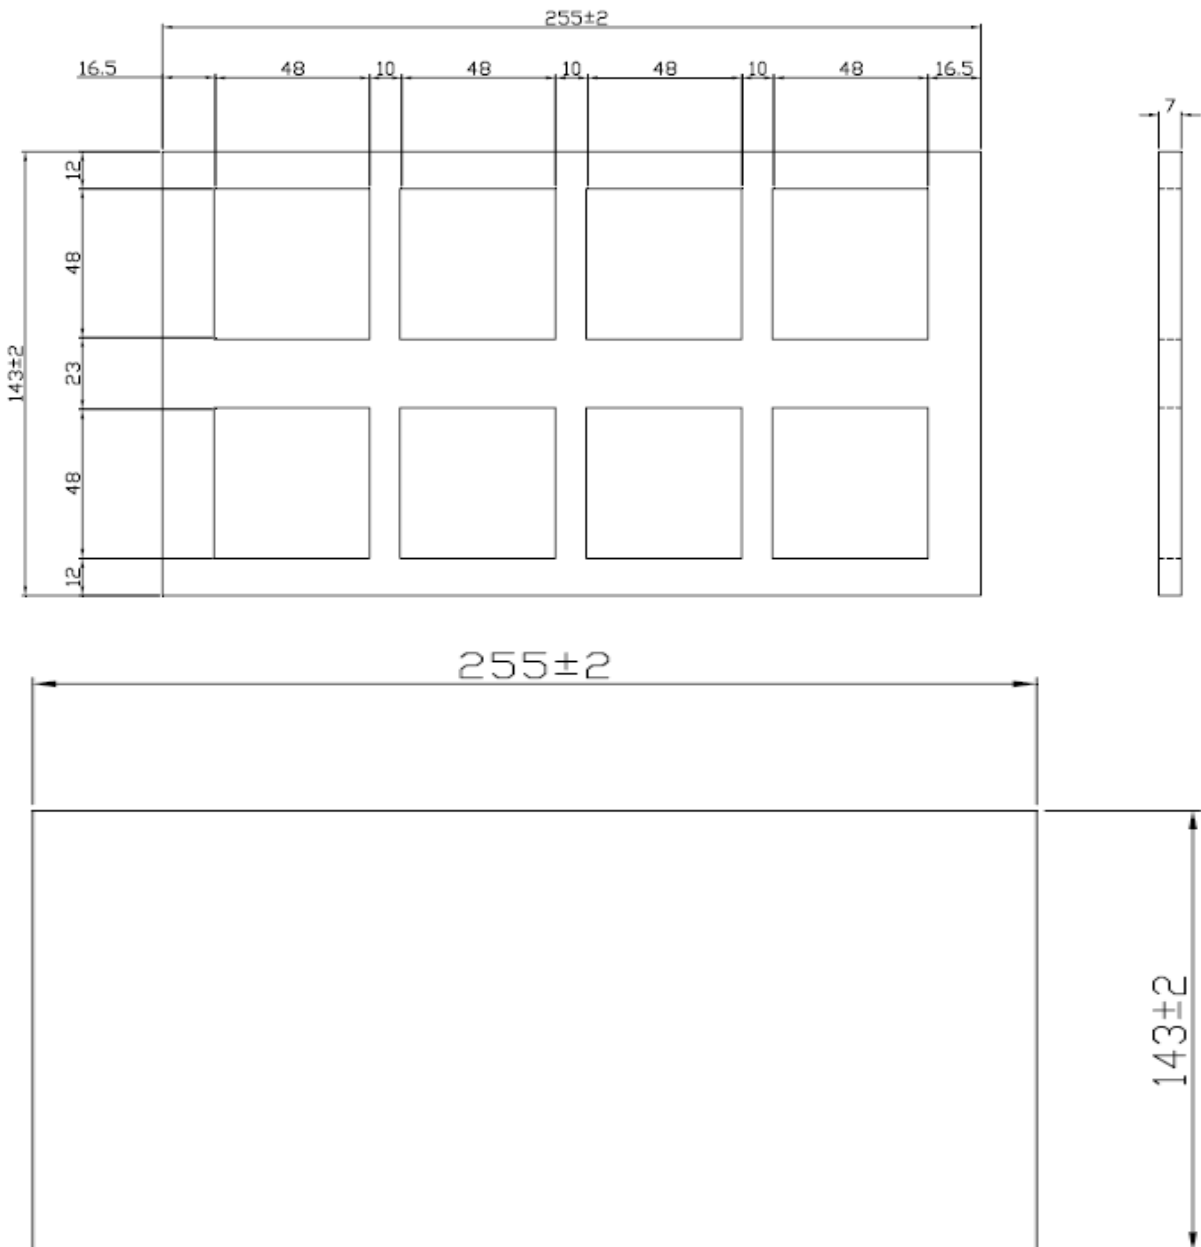

J. PACKING

Outer Carton

