



TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,
Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: tstsales@mail.taisaw.com Web: www.taisaw.com

Approval Sheet For Product Specification

Issued Date: 2/24/2004 (REV. NO: 2)

Product Name: SMD 5x7 45MHz Crystal Filter

TST Parts No.: TY0122A

Customer Parts No.: _____

Company: _____
Division: _____
Approved by : _____
Date: _____

Checked by: _____ CC Hsu

Approval by: _____ TF Yang

Date: _____ 2/24/2004



TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,
Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: tstsales@mail.taisaw.com Web: www.taisaw.com


SMD 5x7 45MHz Crystal Filter

MODEL NO.: TY0122A

REV. NO.: 2

Features:

- Surface Mount Seam Weld Package
- 3-pole IF Filter
- High Reliability

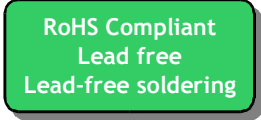


Description and Applications:

Surface mount 5.0mmx7.0mm crystal filter for use in wireless telecommunication devices.


Electrical Specifications:

TY0122A	Specification
Center Frequency Fo	45.0 MHz, Fundamental
Insertion Loss	3.0 dB max
Ripple (@+/-3.75 KHz)	1.0 dB max
3 dB Passband	+/-3.75 KHz
Stopband (@+/-12.5 KHz)	10 dB min
Ultimate Attenuation @ Fo-910 KHz	65 dB min
Spurious	10 dB min
Terminating Impedance	200Ω// 4.0pF
Operating Temperature	-30°C ~ +80°C
Marking	Laser marking

Frequency Response:

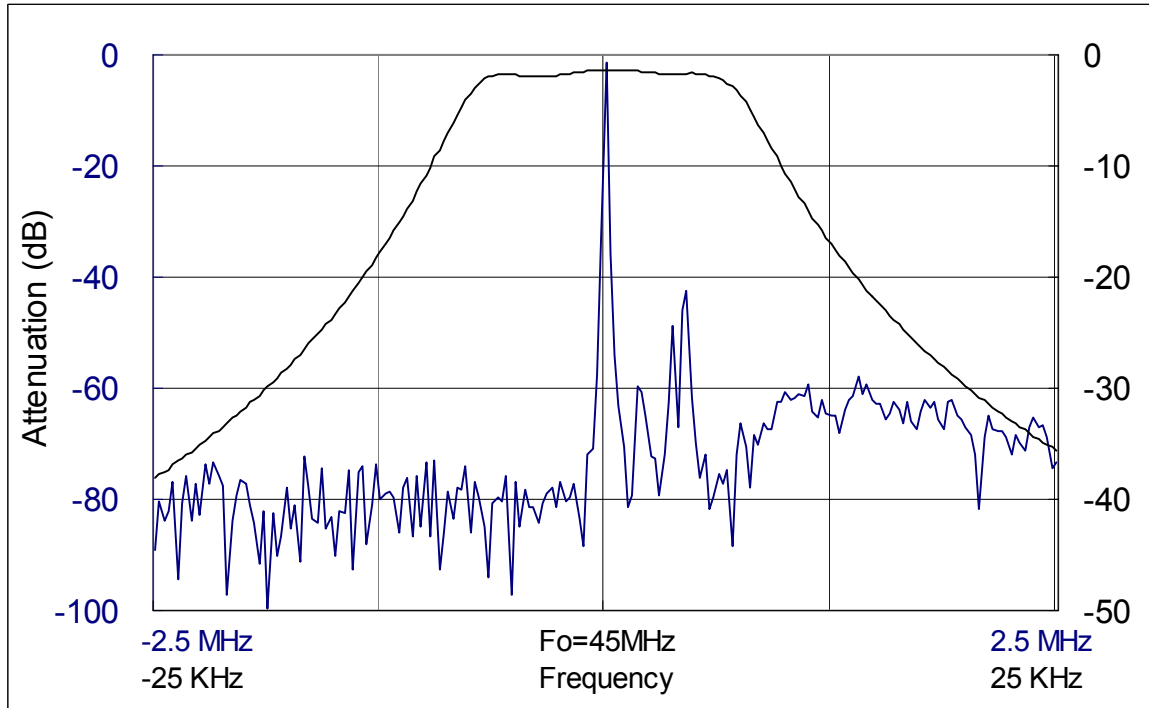

Mechanical Dimensions (mm):

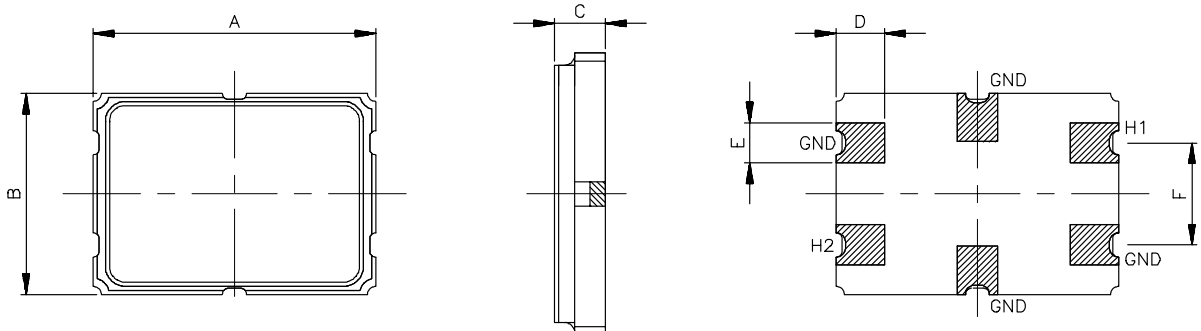


A	B	C	D	E	F
7.00	5.00	1.27	1.21	0.99	2.54
±0.18	±0.18	±0.20	±0.13	±0.13	±0.13

Marking:

First line: Frequency (45.000)

Second line: Model Number+TST Logo+Crystal Filter Family+Date code

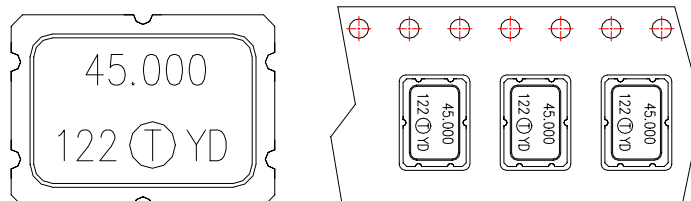


Product Code Table

Year	2001 2005	2002 2006	2003 2007	2004 2008
Product Code	Y	y	<u>Y</u>	<u>y</u>


Date Code Table

WK01	WK02	WK03	WK04	WK05	WK06	WK07	WK08	WK09	WK10	WK11	WK12	WK13
A	B	C	D	E	F	G	H	I	J	K	L	M
WK14	WK15	WK16	WK17	WK18	WK19	WK20	WK21	WK22	WK23	WK24	WK25	WK26
N	O	P	Q	R	S	T	U	V	W	X	Y	Z
WK27	WK28	WK29	WK30	WK31	WK32	WK33	WK34	WK35	WK36	WK37	WK38	WK39
a	b	c	d	e	f	g	h	i	j	k	l	m
WK40	WK41	WK42	WK43	WK44	WK45	WK46	WK47	WK48	WK49	WK50	WK51	WK52
n	o	p	q	r	s	t	u	v	w	x	y	z

Reel Dimensions (mm):

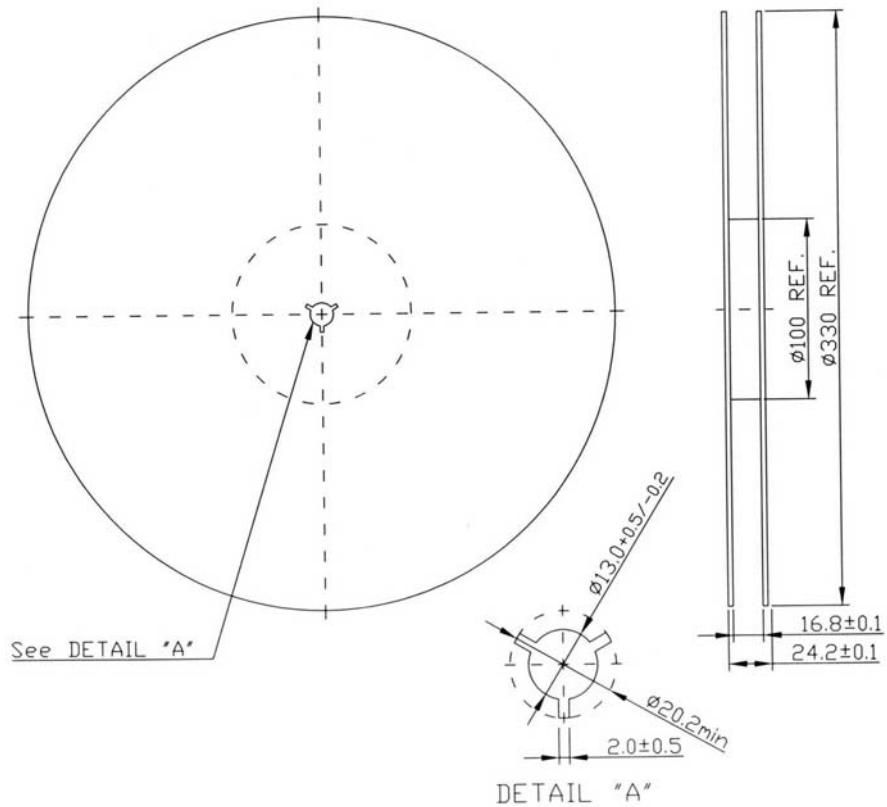

Tape Dimensions (mm):

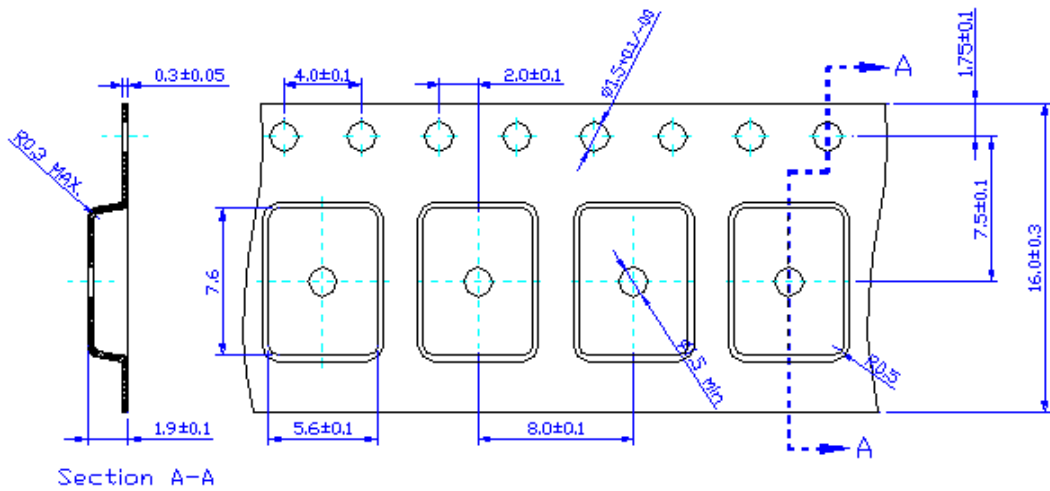

Reflow Profile:

1. Preheating shall be fixed at $140 \sim 160 \text{ }^\circ\text{C}$ for $60 \sim 90$ seconds.
2. Ascending time to preheating temperature $150 \text{ }^\circ\text{C}$ shall be 30 seconds min.
3. Heating shall be fixed at $200 \text{ }^\circ\text{C}$ for $50 \sim 60$ seconds and at $230 \pm 10 \text{ }^\circ\text{C}$ peak.

