



# TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,

Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: [tstsales@mail.taisaw.com](mailto:tstsales@mail.taisaw.com) Web: [www.taisaw.com](http://www.taisaw.com)

## Product Specifications Approval Sheet

Product Name: SAW Filter 897.5 MHz (BW 35MHz) SMD 3.0X3.0 mm

TST Parts No.: TA1916A

Customer Parts No.: \_\_\_\_\_

Company: _____
Division: _____
Approved by : _____
Date: _____

Checked by: \_\_\_\_\_ Sam Lin *Sam Lin*

Approval by: \_\_\_\_\_ Andy Yu *Andy Yu*

Date: \_\_\_\_\_ 2017/08/30

1. Customer signed back is required before TST can proceed with sample build and receive orders.
2. Orders received without customer signed back will be regarded as agreement on the specifications.
3. Any specifications changes must be approved upon by both parties and a new revision of specifications shall be released to reflect the changes



# TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,  
Taoyuan, 324, Taiwan, R.O.C.  
TEL: 886-3-4690038 FAX: 886-3-4697532  
E-mail: [tstsales@mail.taisaw.com](mailto:tstsales@mail.taisaw.com) Web: [www.taisaw.com](http://www.taisaw.com)

## SAW Filter 898MHz

MODEL NO.:TA1916A

REV. NO.:1.0

### A. MAXIMUM RATING:

1. Input Power Level: 10 dBm
2. DC Voltage : 3 V
3. Operating Temperature: -40°C to +85°C
4. Storage Temperature: -40°C to +85°C

RoHS Compliant  
Lead free  
Lead-free soldering

Electrostatic Sensitive Device (ESD)


### B. ELECTRICAL CHARACTERISTICS:

- Terminating source impedance (single) :  $Z_s = 50 \Omega$   
 Terminating load impedance(single) :  $Z_L = 50 \Omega$

Item	Unit	Min.	Typ.	Max
Center frequency <b>Fc</b>	MHz	-	897.5	-
Insertion Loss (880 ~ 915 MHz) <b>IL</b>	dB	-	2.2	3.5
Amplitude ripple (880 ~ 915 MHz)	dB	-	1.3	2.0
<b>Attenuation</b> (Reference level from 0 dB)				
DC ~ 738 MHz	dB	35	40	-
738 ~ 773 MHz	dB	35	40	-
773 ~ 860 MHz	dB	20	35	-
925 ~ 930 MHz	dB	25	30	-
930 ~ 960 MHz	dB	25	30	-
960 ~ 1000 MHz	dB	25	35	-
1000 ~ 2035 MHz	dB	25	30	-
2035 ~ 2500 MHz	dB	25	30	-
2500 ~ 3000 MHz	dB	25	30	-
3000 ~ 3500 MHz	dB	15	20	-
Temperature coefficient of frequency	ppm/°C	-	-36	-


### C.. TEST CIRCUIT:

HP Network analyzer

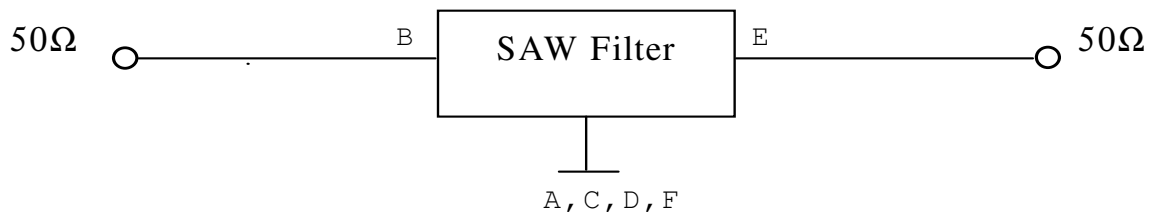


## D. Frequency Characteristics:


### S21 response: Center 898MHz, Span 500MHz

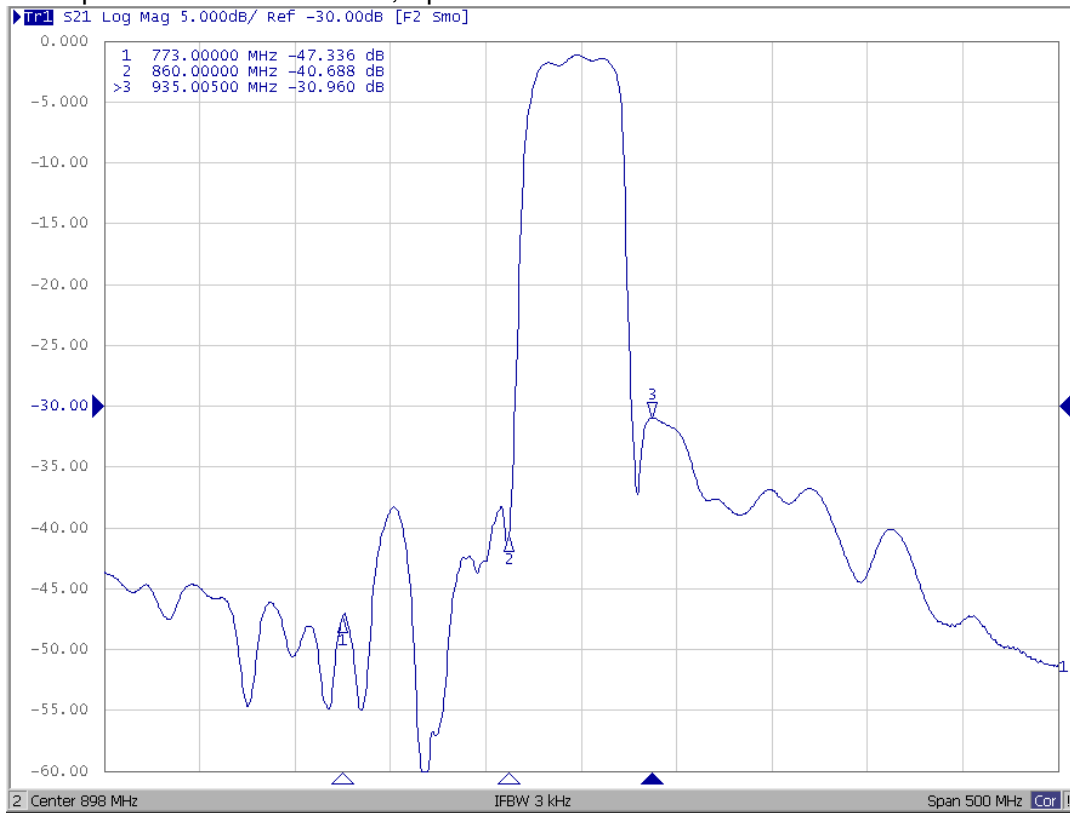


### S21 respons: Span 80MHz

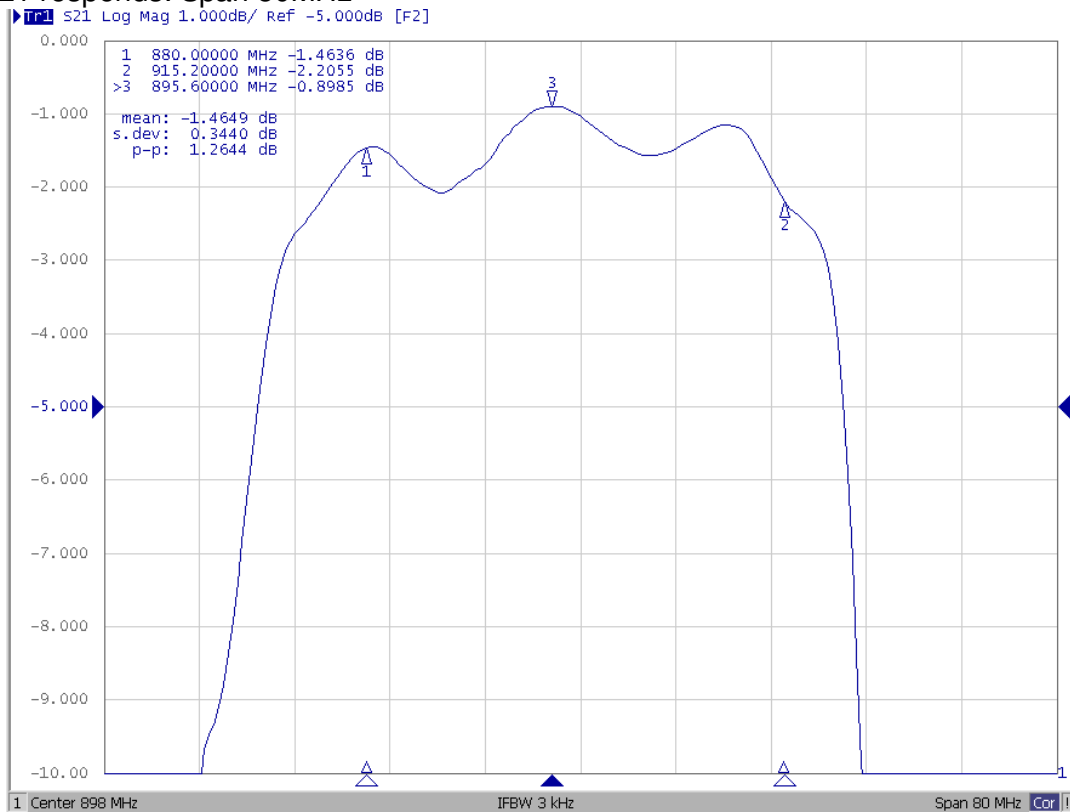

### S21 response: 0MHz ~ 3000MHz

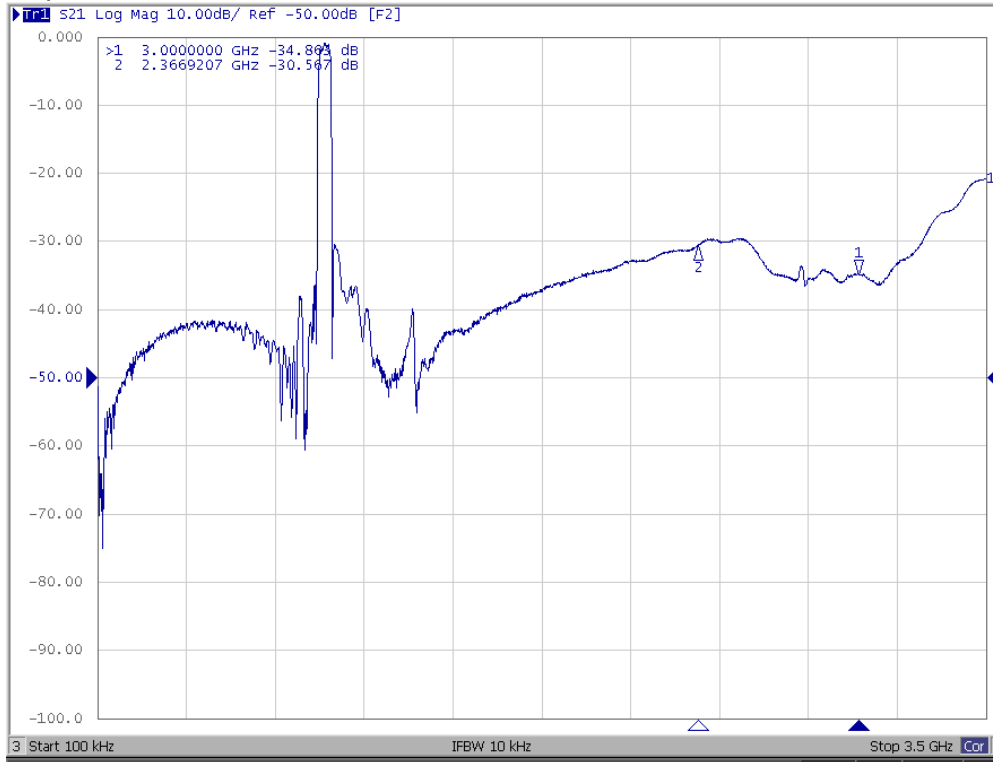

### E.OUTLINE DRAWING:

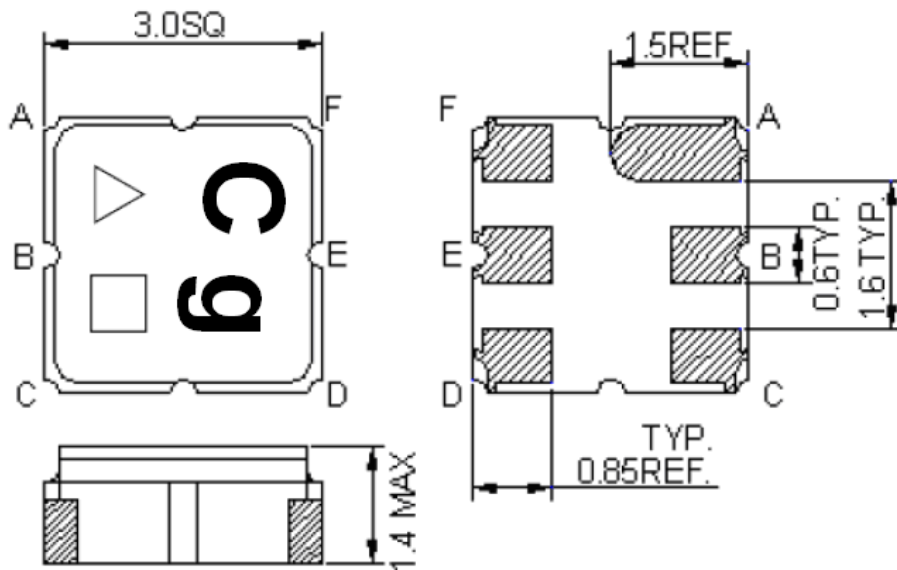


△ : Year Code (2009->9, 2010->0, ..., 2018->8)

□ : Date Code (Follow the table from planner each year)

WK01	WK02	WK03	WK04	WK05	WK06	WK07	WK08	WK09	WK10	WK11	WK12	WK13
A	B	C	D	E	F	G	H	I	J	K	L	M
WK14	WK15	WK16	WK17	WK18	WK19	WK20	WK21	WK22	WK23	WK24	WK25	WK26
N	O	P	Q	R	S	T	U	V	W	X	Y	Z
WK27	WK28	WK29	WK30	WK31	WK32	WK33	WK34	WK35	WK36	WK37	WK38	WK39
a	b	c	d	e	f	g	h	i	j	k	l	m
WK40	WK41	WK42	WK43	WK44	WK45	WK46	WK47	WK48	WK49	WK50	WK51	WK52
n	o	p	q	r	s	t	u	v	w	x	y	z



**F. PCB FOOTPRINT:**

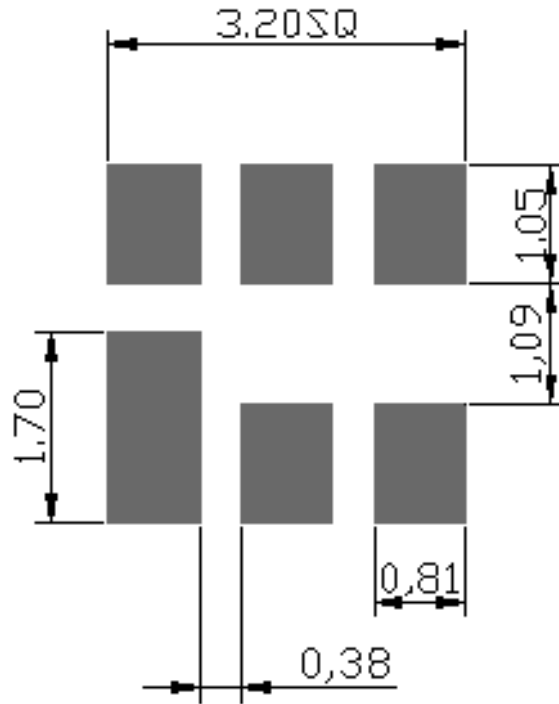


**G. PACKING:**

1. REEL DIMENSION

(Please refer to FR-75D10 for packing quantity)

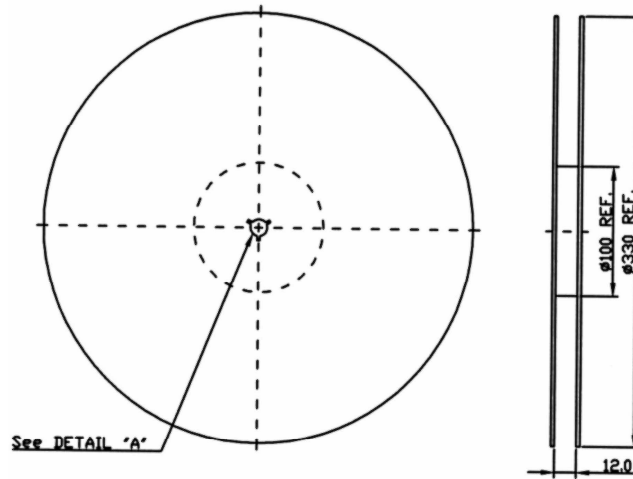

## 2. TAPE DIMENSION

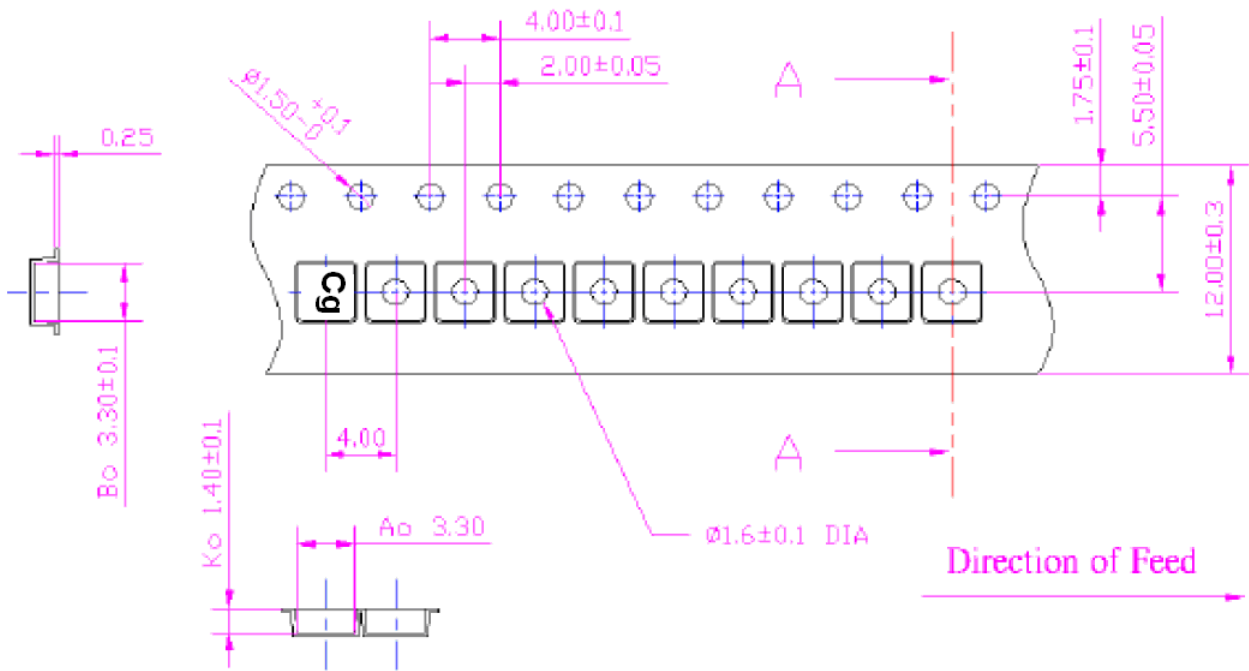

## H. RECOMMENDED REFLOW PROFILE :

1. Preheating shall be fixed at 150~180°C for 60~90 seconds.
2. Ascending time to preheating temperature 150°C shall be 30 seconds min.
3. Heating shall be fixed at 220°C for 50~80 seconds and at 260°C +0/-5°C peak (20~40sec).
4. Time: 2 times.

