

## TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,
Taoyuan, 324, Taiwan, R.O.C.
TEL: 886-3-4690038 FAX: 886-3-4697532
E-mail: tstsales@mail.taisaw.com Web: www.taisaw.com

# **Product Specifications Approval Sheet**

Product Description	: SAW Resonator	433.92 MHz SMI	D 5.0X3.5 mm
TST Part No.: TC02	69A		
Customer Part No.:			
Customer signature	required		
Company:			_
Division:			_
Approved by :			_
Date:			_
Checked by:	Sam Lin	TanLin	
Checked by:	Bob Chau	philm	
Date:	2016/03/30		

- 1. Customer signed back is required before TST can proceed with sample build and receive orders.
- 2. Orders received without customer signed back will be regarded as agreement on the specifications.
- 3. Any specifications changes must be approved upon by both parties and a new revision of specifications shall be released to reflect the changes.



## TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District, Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532 E-mail: tstsales@mail.taisaw.com Web: www.taisaw.com

#### SAW Resonator 433.92 MHz

MODEL NO.: TC0269A REV. NO.:4

## A. FEATURES:

1. 1-Port Resonator.

#### B. MAXIMUM RATING:

1.Input Power Level: 0 dBm

2.DC voltage: 12 V

3.Operating Temperature: -40°C to +85°C 4.Storage Temperature: -40°C to +85°C

## C. <u>ELECTRICAL CHARACTERISTICS:</u>

Reference Temperature T<sub>A</sub>=25°C


Characteristic	Units	Minimum	Typical	Maximum
Center frequency Fc	MHz	433.845	433.920	433.995
Insertion Loss IL	dB	-	1.2	1.7
Ageing of fc	ppm/yr	-	-	±10
Equivalent Circuit Model				
Motional capacitance C1	fF	-	1.79	-
Motional inductance L1	$\mu$ H	-	75.72	-
Motional resistance R1	Ohm	-	14.3	23
Parallel capacitance Co	pF	-	3.2	-
Frequency Temperature coefficient (TC <sub>f</sub> )	ppm/c*2	-	0.032	-
Turnover To	deg.C	5	15	25

Temperature dependence of fc:  $fc(T_A)=fc(T_O)(1+TC_f(T_A-T_O)^2)$ 

**RoHS Compliant** 

Lead free Lead-free soldering

## D.OUTLINE DRAWING:

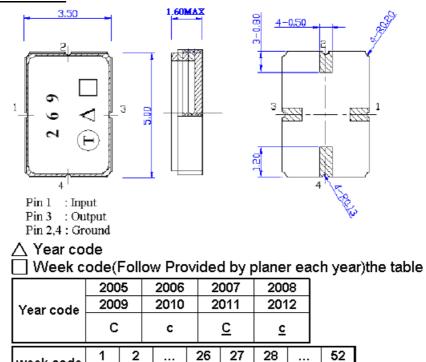


## **E.EQUVIRENT CIRCUIT:**

## One-Port Resonator:

week code


В

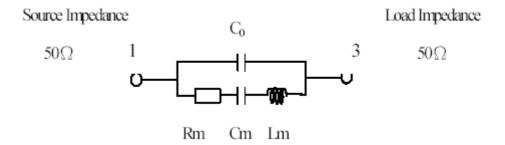

b


z

## F.FREQUENCY CHARACTERISTICS:

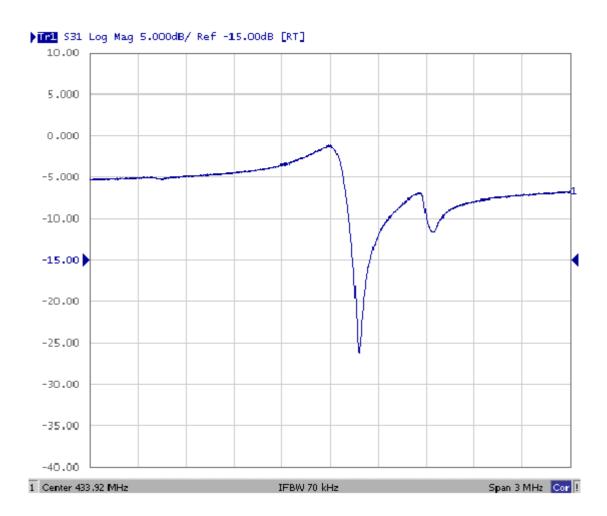


## G. TEST CIRCUIT:

Network analyzer

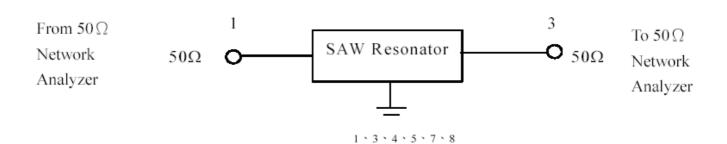

## H. PACKING:

## 1.REEL DIMENSION

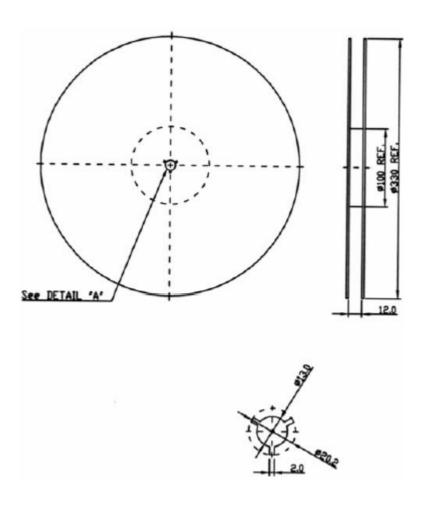

## 2.TAPE DIMENSION

