



TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,
Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: tstsales@mail.taisaw.com Web: www.taisaw.com

Product Specifications Approval Sheet


Product Description: SAW DPX 836.5/881.5 MHz LTE Band 5 SMD 1814

TST Part No.: TF0129A

Customer Part No.: _____

Customer signature required
Company: _____
Division: _____
Approved by : _____
Date: _____

Checked by: _____ Anne Chen 

Approved by: _____ Bob Chau 

Date: _____ 2017, 04, 10

1. Customer signed back is required before TST can proceed with sample build and receive orders.
2. Orders received without customer signed back will be regarded as agreement on the specifications.
3. Any specifications changes must be approved upon by both parties and a new revision of specifications shall be released to reflect the change



TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,
Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: tstsales@mail.taisaw.com Web: www.taisaw.com

SAW DPX 836.5/881.5 MHz LTE Band 5 SMD 1814 (25 MHz BW)

MODEL NO.:TF0129A

REV.No.:2

A. MAXIMUM RATING:

1. Operating temperature range: -30 °C to +85 °C
2. Storage temperature range: -30 °C to +85 °C
3. Input power : 29dBm (Ta=+50deg C,50000h,CW)
4. Maximum DC Voltage: +/-3 V
5. Moisture Sensitivity Level: Level 1
6. ESD 50V(MM) 100V(HBM)

RoHS Compliant
Lead free
Lead-free soldering

Electrostatic Sensitive Device (ESD)

B. ELECTRICAL CHARACTERISTICS:

Terminating impedance (Tx Port): 50 Ω (Single-ended)

Terminating impedance (Rx Port): 100 Ω (Differential)

Terminating impedance (Ant Port): 50//8.2nH Ω (Single-ended)

Tx to ANT (f_{T0}=836.5 MHz)

Parameters Description		Unit	Min	Typ	Max	Remarks
Insertion Loss	824~849 MHz	dB(*1)	-	1.4	1.9	
Amplitude ripple	824~849 MHz	dB	-	0.5	1.2	
VSWR	ANT	-	-	1.4	2.0	
	Tx	824~849 MHz	-	1.5	2.0	
Attenuation:						
779~804 MHz		dB	30	38	-	
869~894 MHz		dB	45	50	-	
1574~1577 MHz		dB	43	46	-	
1648~1698 MHz		dB	35	44	-	
2472~2547 MHz		dB	24	30	-	

ANT to Rx ($f_{T0}=881.5$ MHz)

Parameters Description		Unit	Min	Typ	Max	Remarks
Insertion Loss	869~894 MHz	dB(*1)		1.7	2.2	
Amplitude ripple	869~894 MHz	dB		0.4	1.2	
Phase balance	869~894 MHz	Deg	-10	-1/+3	+10	
Amplitude balance	869~894 MHz	dB	-1.0	-0.3/+0.2	+1.0	
VSWR	ANT			1.4	2.0	
	Rx	869~894 MHz		1.5	2.0	
Attenuation:						
824~849 MHz		dB	50	56		
1738~1788 MHz		dB	40	51		
1850~1910 MHz		dB	40	50		
1920~1980 MHz		dB	40	50		
2400~2500 MHz		dB	38	48		
3476~3576 MHz		dB	35	44		

Tx to Rx

Isolation	824~849 MHz	dB	55	58	-	
	869~894 MHz	dB	49	52	-	

(*1) Specification of insertion loss excludes loss that comes from the test board. (Approximately 0.05dB)

C.Evaluation Circuit


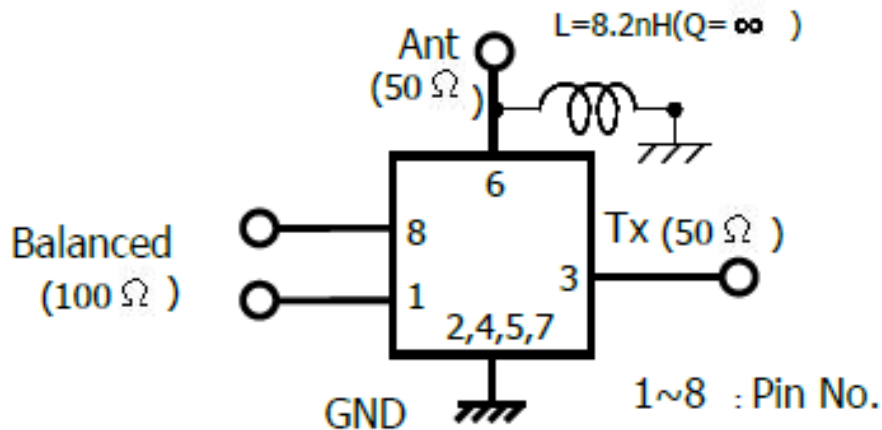



Figure 2. Evaluation Circuit

D. FREQUENCY CHARACTERISTICS:

Tx to Ant

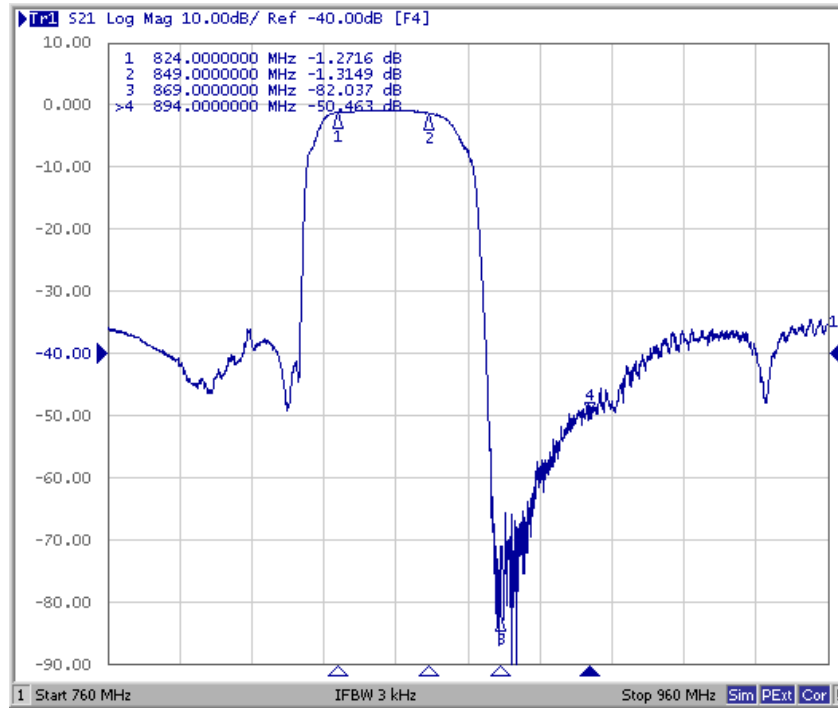


Ant to Rx

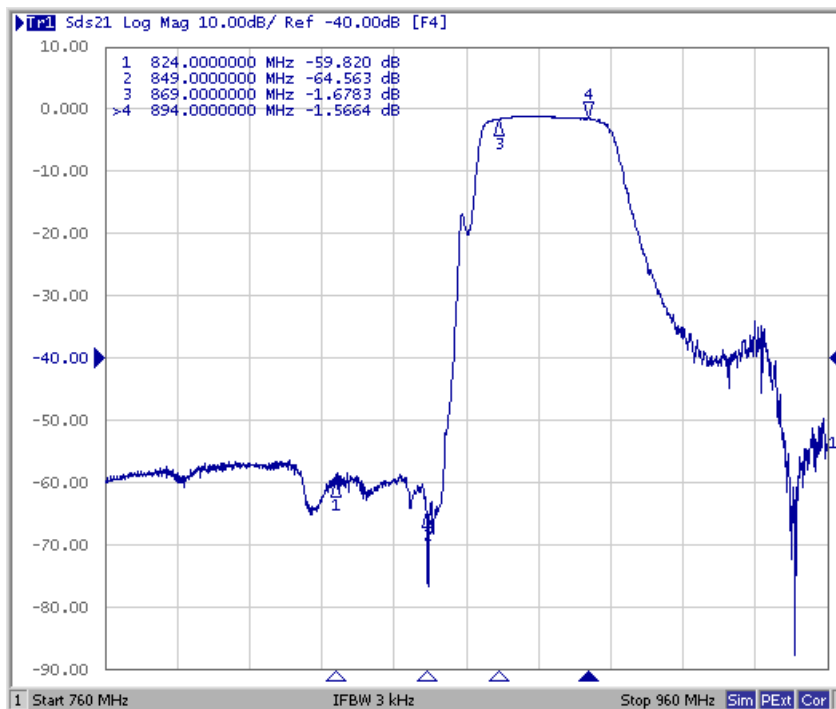


These data exclude loss that comes from the test board.

Tx to Ant ,Ant to Rx


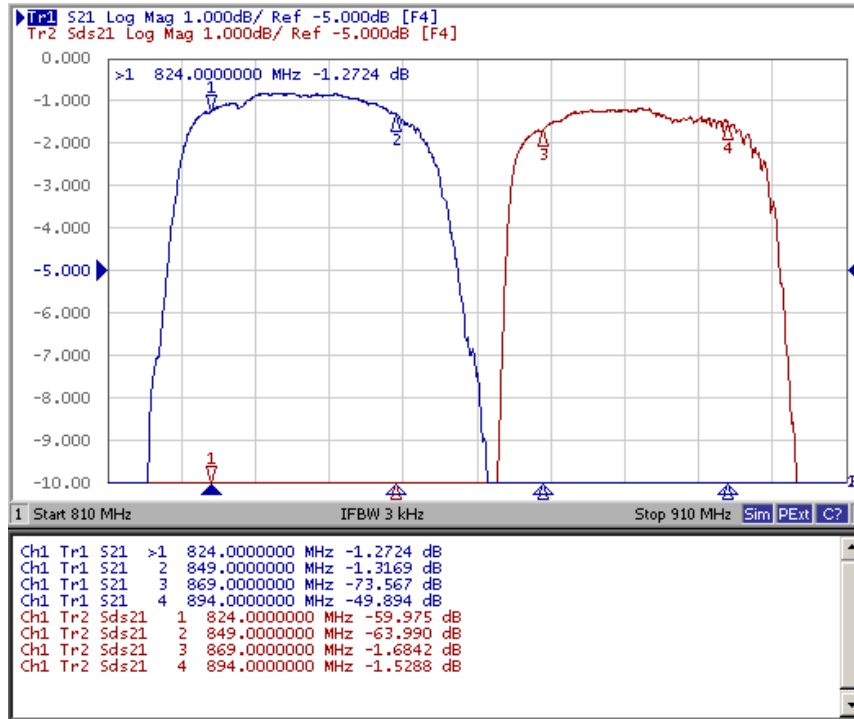


Tx to Rx Isolation


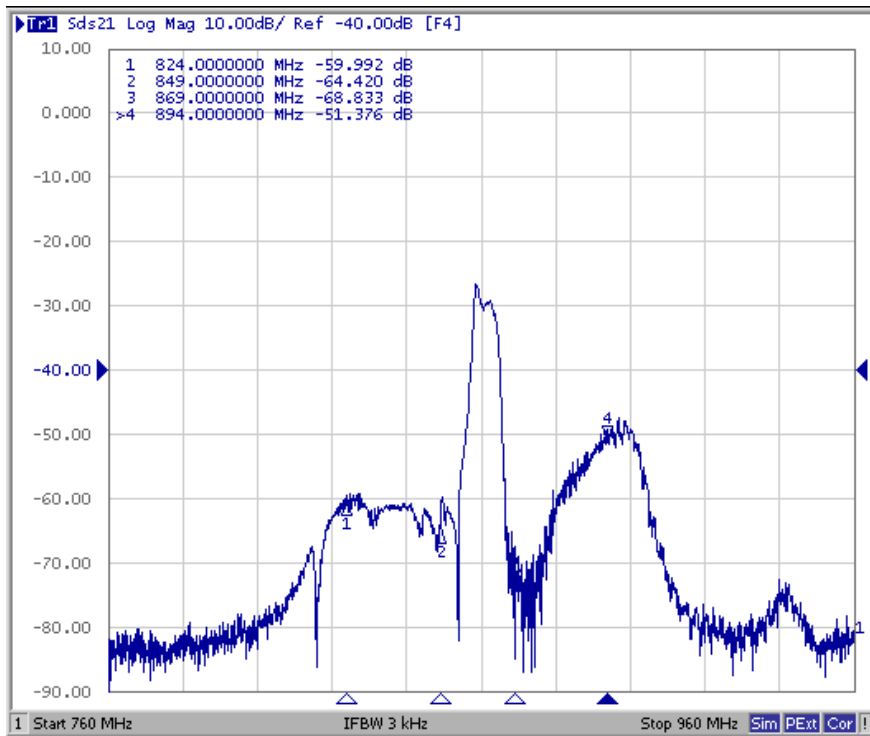


These data exclude loss that comes from the test board



Tx Port

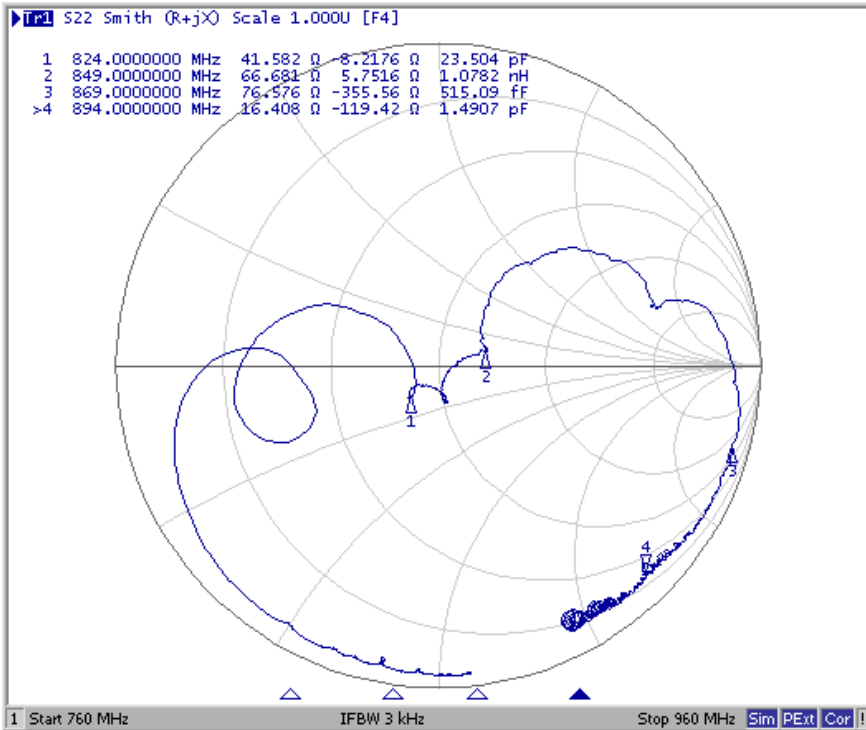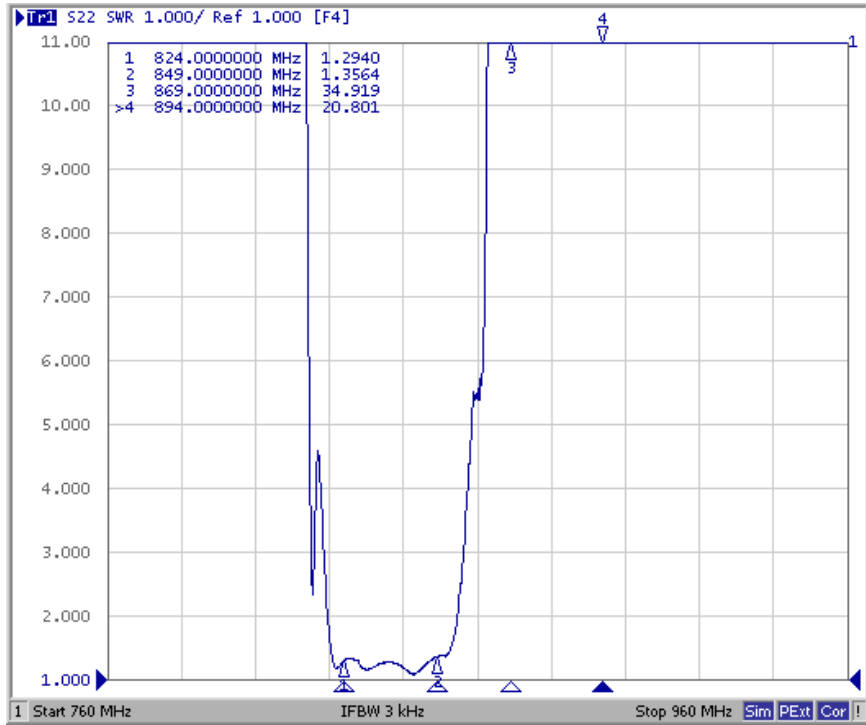


Rx Port

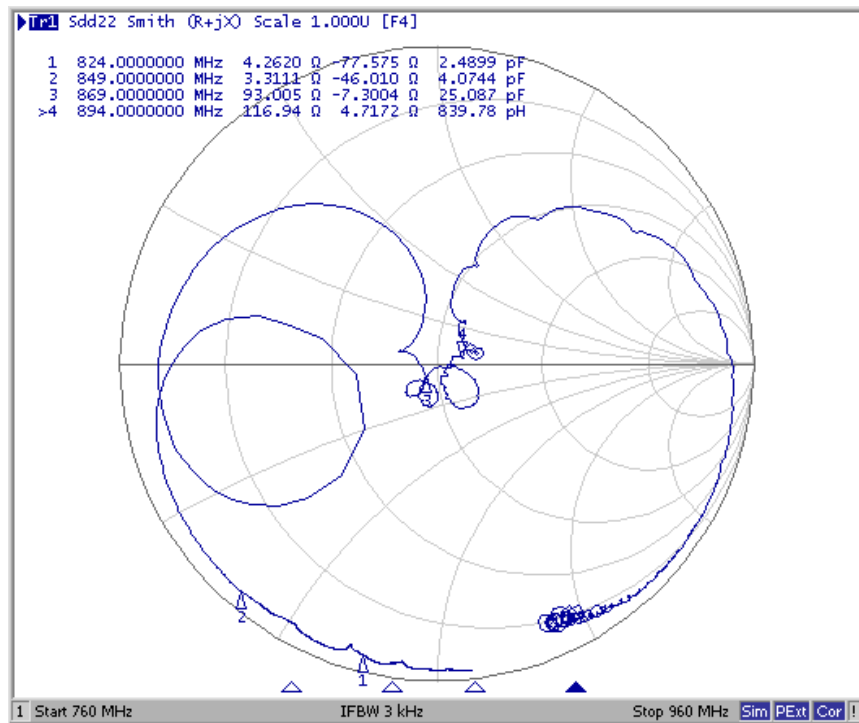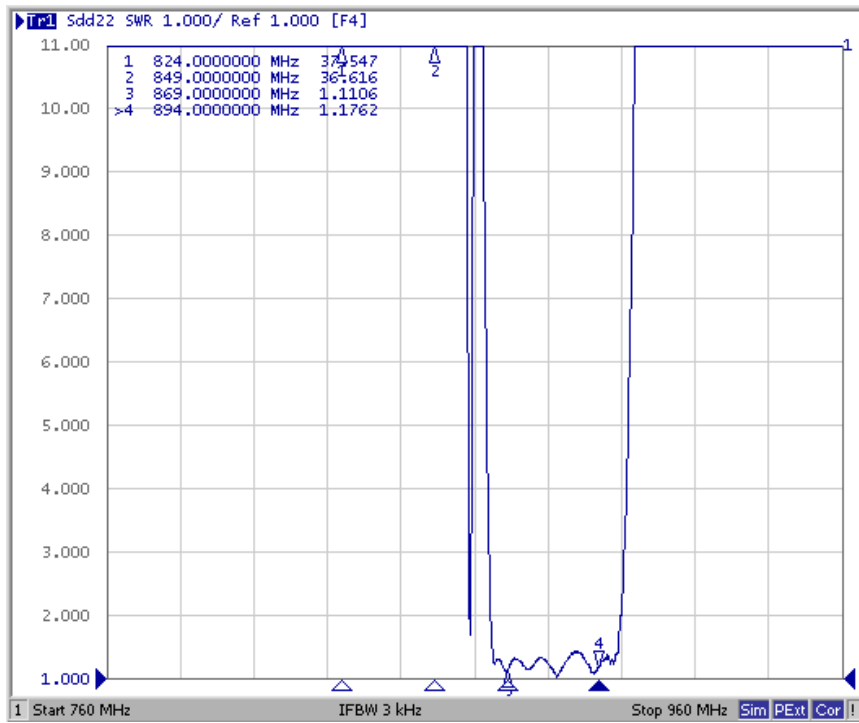


Ant Port

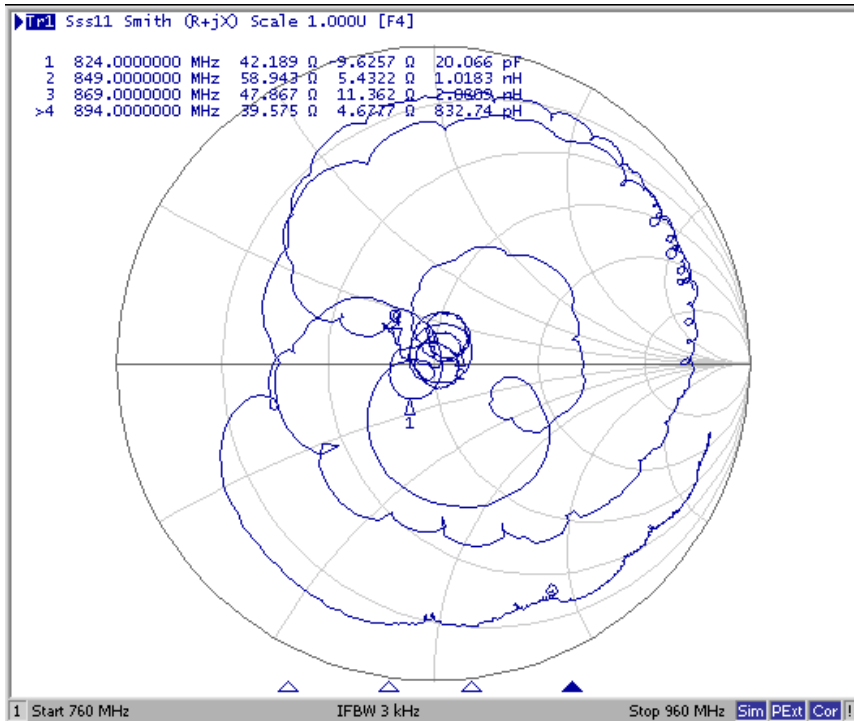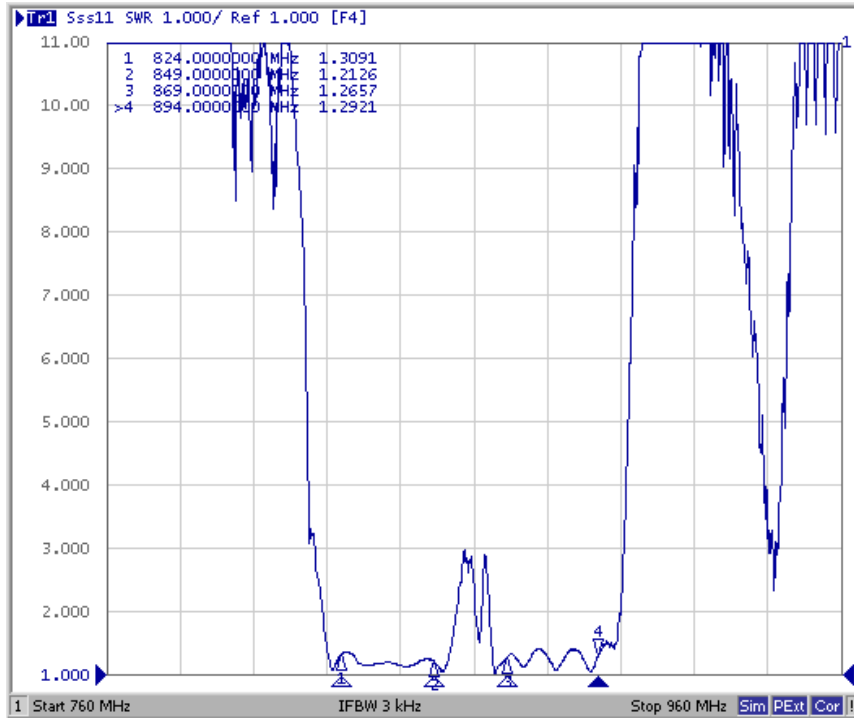


Ant to Rx (Amplitude balance)

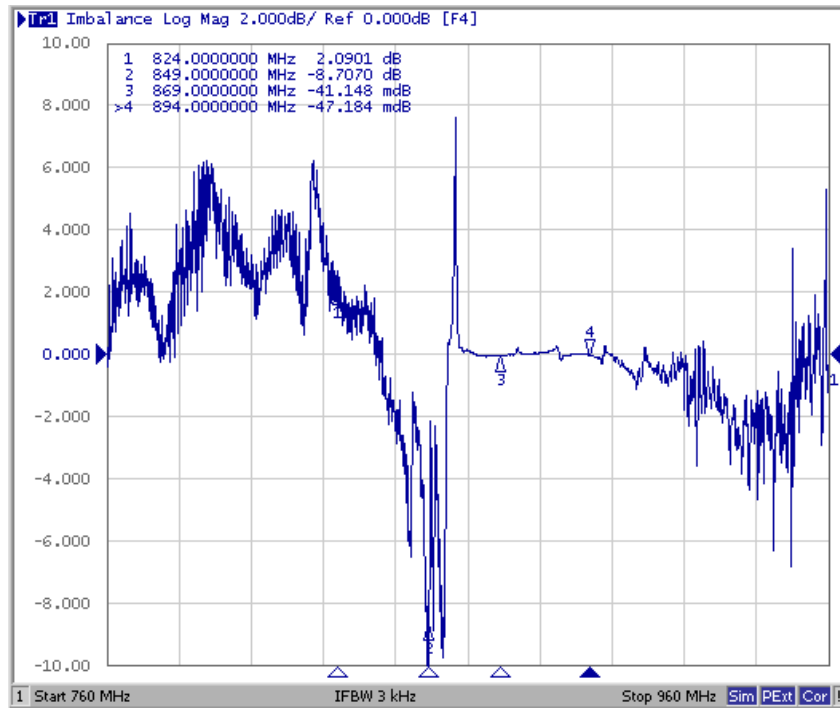


Ant to Rx (Phase balance)

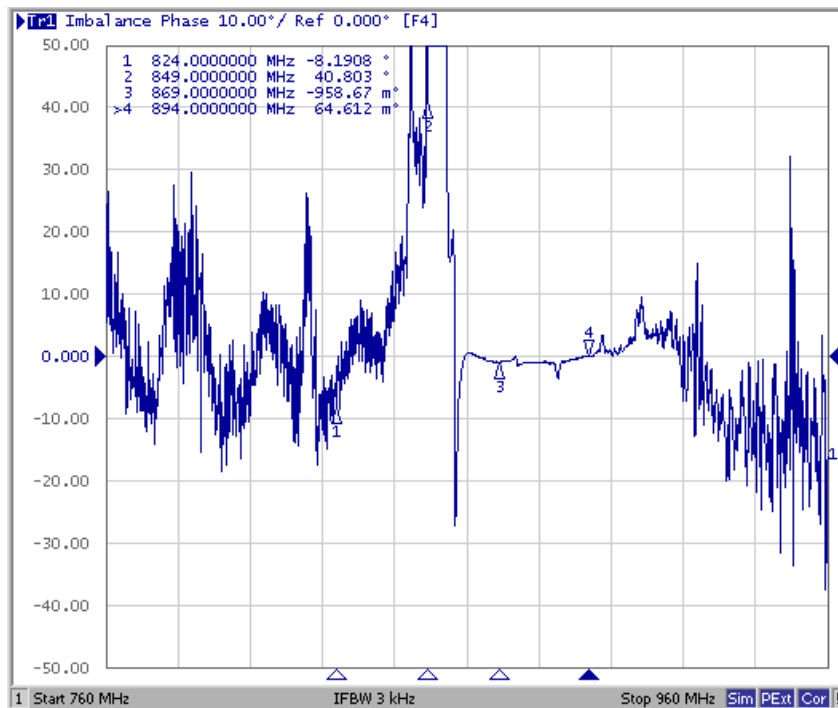


Tx to Ant (Wide span)

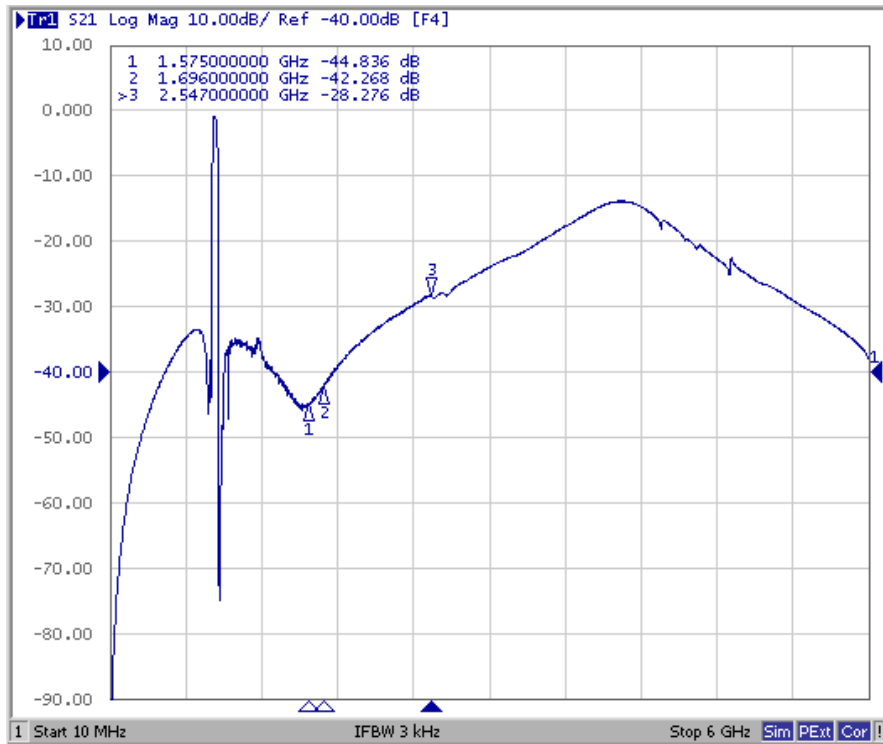

Ant to Rx (Wide span)

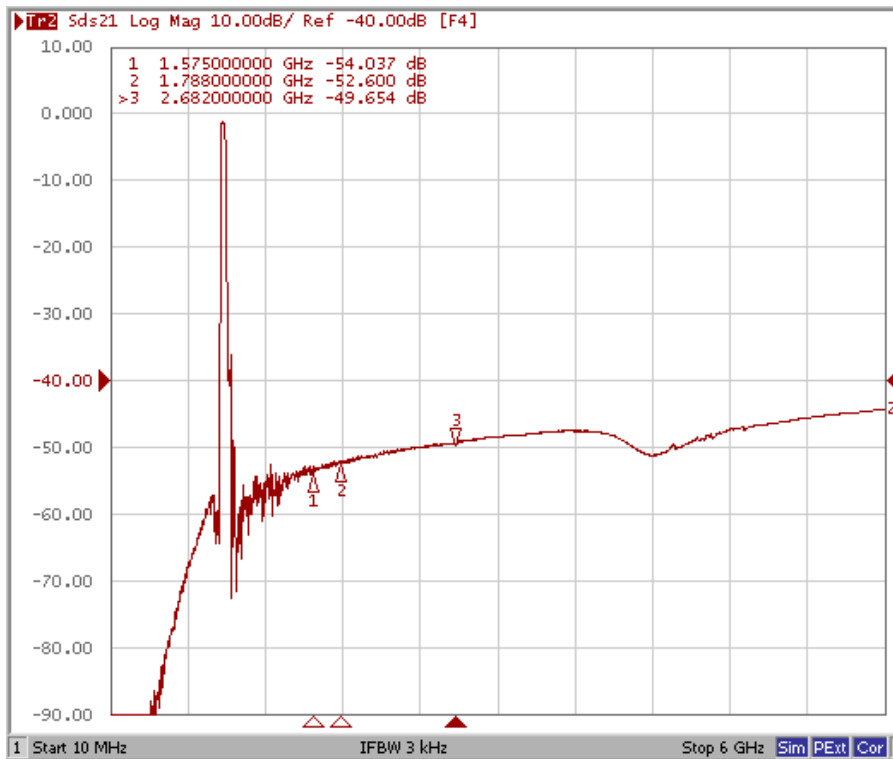

E. OUTLINE DRAWIN:

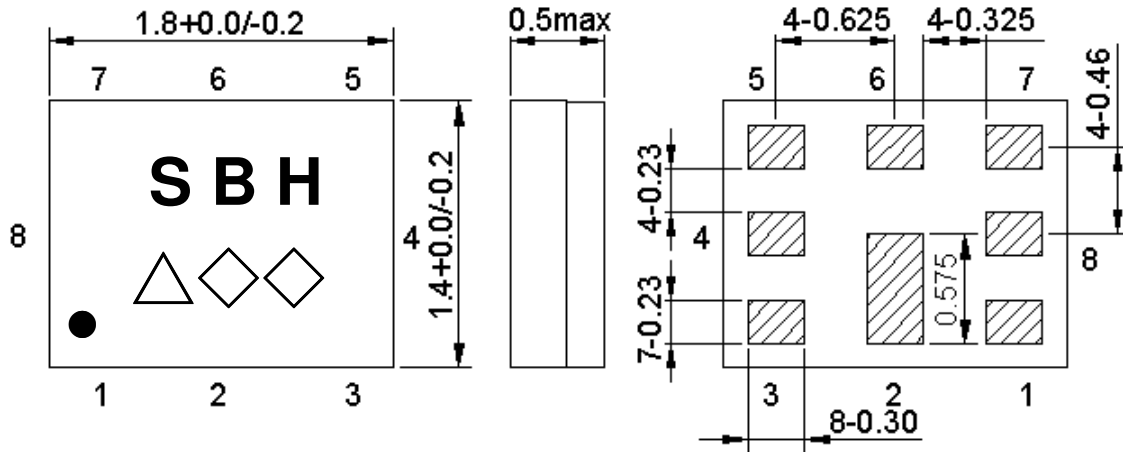

Marking name : **SBH**

△ : Date code(2016 May → s ,....., 2019 Dec→m.)

◇◇: Lot Code.


Product Date Code. Follow below table.

Year	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
2016	n	p	q	r	s	t	u	v	w	x	y	z
2017	A	B	C	D	E	F	G	H	J	K	L	M
2018	N	P	Q	R	S	T	U	V	W	X	Y	Z
2019	a	b	c	d	e	f	g	h	j	k	l	m

Pin Configuration:


Pin No.	Pin Name	Description
1	Rx	Receive Pin
2	GND	Ground Pin
3	Tx	Transmitter Pin
4	GND	Ground Pin
5	GND	Ground Pin
6	ANT	Antenna Pin
7	GND	Ground Pin
8	GND	Ground Pin

F. FOOTPRINT:

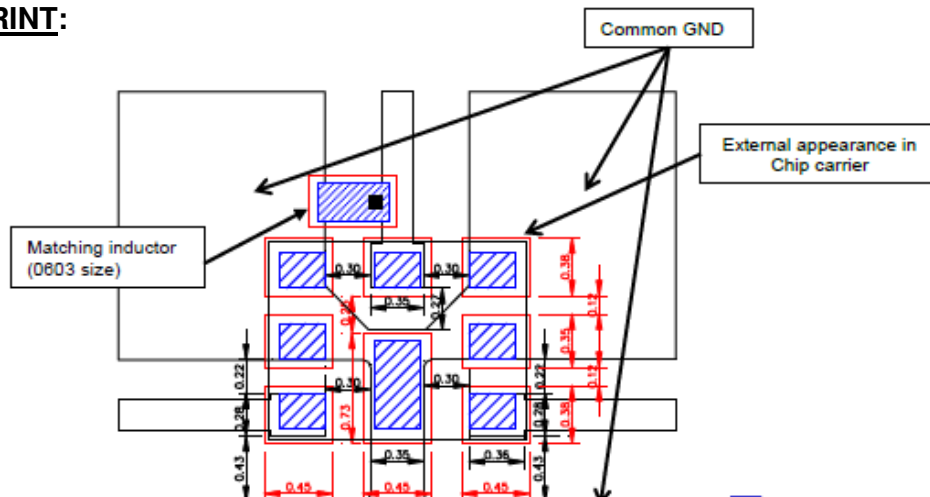

G. PACKING:

1. REEL DIMENSION

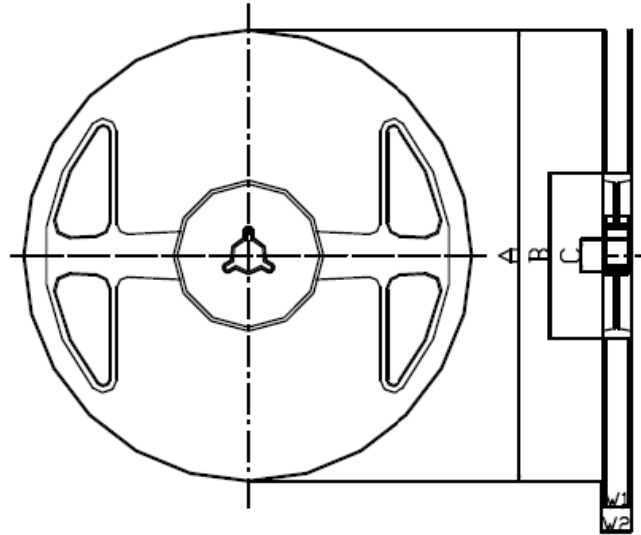

Materials of Reel

Material : Polystyrene + Carbon

Characteristics : Conforms to EIAJ-ET-7200A


Color : Black

Surface resistance (reference value) : $10^9\Omega/\text{sq Max.}$

Unit : mm

Code	Quantity	A	B	C	W1	W2
Z	3,000 pcs	$\phi 180.0 +0.0/-1.5$	$\phi 66.0 +/-0.5$	$\phi 13.0 +/-0.2$	$9.0 +1.0/-0.0$	$11.4 +/-1.0$

2. TAPE DIMENSION

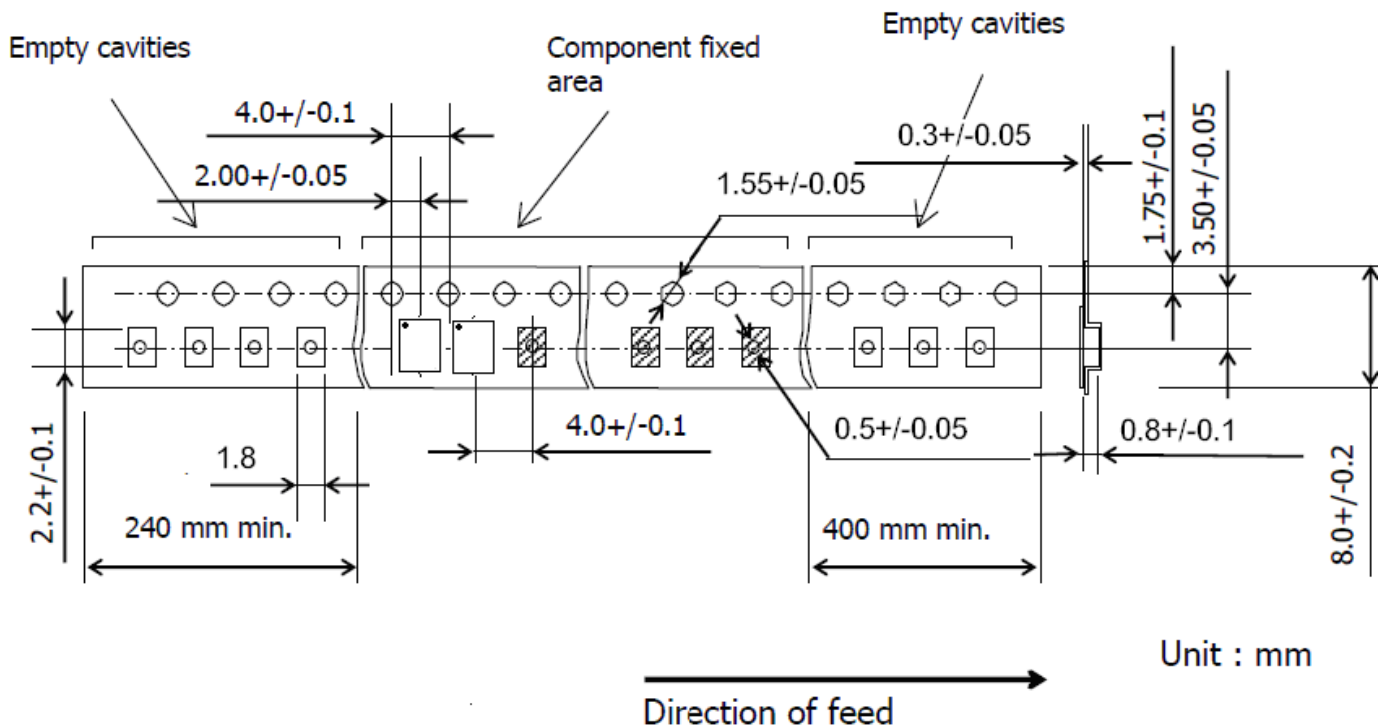

Unit : mm

H. RECOMMENDED REFLOW PROFILE :

1. Preheating shall be fixed at 150~180°C for 60~90 seconds.
2. Ascending time to preheating temperature 150°C shall be 30 seconds min.
3. Heating shall be fixed at 220°C for 50~80 seconds and at 245~260°C peak (min. 10sec).
4. Time : 2 times.

